

15-169-00045-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

NORTH



Locate well correctly on above
Section Plat

Saline County. Sec. 23 Twp. 15S. Rge. (E) 3 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. Corner NE 1/4 NE 1/4

Lease Owner The Mouser Drilling Company

Lease Name Carlin Estate Well No. 1

Office Address 915 Union National Bank Bldg., Wichita, Kansas.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 3-15- 19 45

Application for plugging filed 9-5- 19 45

Application for plugging approved 9-10- 19 45

Plugging commenced 9-4- 19 45

Plugging completed 9-15- 19 45

Reason for abandonment of well or producing formation.

Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Ruell Durkee

Producing formation None Depth to top Bottom Total Depth of Well 3471 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Anhydrite				10 3/4"	220'	None
Viola				7"	3245'	636'


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded hole from 3471' to 3242' and set plug from 2 sacks cement. Mudded hole to 2000'. Run 20 sacks cement. Mudded hole to 8' and run 5 sacks cement to top of surface.

FILE 23 15S 3W
BOOK pg 25 NE 1/4

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Mouser Drilling Company,
Address 915 Union National Bank Bldg., Wichita, Kansas.

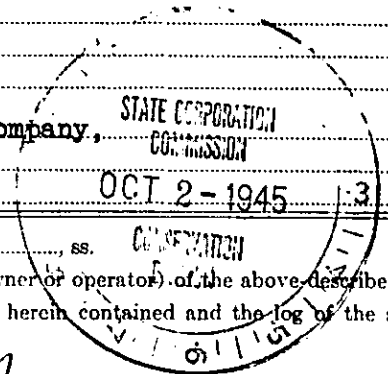

STATE OF Kansas COUNTY OF Sedgwick ss. B. L. Mouser

(employee of owner) or (owner or operator) of the above described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

(Signature) B. L. Mouser

915 Union National Bank Bldg., Wichita, Kansas.
(Address)

SUBSCRIBED AND SWORN to before me this First day of October 19 45

My commission expires Jan. 13 - 1949

Sarah Staw Carpenter
Notary Public.

15-169-00045-00-00

Carlin Estate, No. 1 Well
 25-156-3W, Saline County, Kansas

Drilled for: F. G. Stodder
 Western Ptr Exp Co
 The Mouser Drilling Co
 Drilled by: The Mouser Drilling Co

Drilling Commenced: January 31, 1945
 Drilling Completed: April 7, 1945

Casing Record

10" 220'
 7" OD 3245'

<u>FORMATION</u>	<u>DEPTH</u>
Surface	5
Sand	80
Blue Shale	195
Anhydrite	230
Lime	295
Shale and Shells	380
Sandy lime	420
Broken lime	550
Lime	585
Lime and shale	620
Shale	665
Lime and shale	885
Shale and shells	1160
Lime and shale	1170
Shale and shells	1225
Lime and shale	1589
Lime	1760
Lime and shale	1805
Lime	1830
Lime and shale	1850
Lime	1910
Shale	2085
Lime	2170
Retten lime	2193
Hard lime	2205
Shale	2260
Lime	2290
Retten lime	2320
Lime	2360
Porous lime	2367
Lime	2410
Lime and shale	2478
Lime	2505
Shale	2717
Lime	2778

<u>FORMATION</u>	<u>DEPTH</u>
Chat	2805
Shale	2822
Chat and iron	2826
Chat	2862
Cherty Lime	2932
Cherty lime and shale	2950
Shale	2975
Lime	3006
Shale	3035
Shale and pyrite	3065
Shale	3147
Hunton lime	3176
Shale	3180
Shale	3245
Viola lime	3246
Total Depth - Rotary	
Base of Viola	3392
Shale	3407
Shale	3424
Top Simpson Sand	3424
Sand	3464
Top Arbuckle	3464
Lime	3471

Rotary Measurements - Sample Tops

Mississippi Lime	2717
Base of Mississippi	3006
Hunton Lime	3147
Base of Hunton	3176
Cherty Viola	3245
Crystalline Viola	3284
Simpson shale	3392
Simpson sand	3424
Arbuckle	3464

Total Depth 3471'

Plugged back to 3435' - well abandoned

FILED 25 156-3W
 BOOK PAGE 25 LINE 4
 STATE OF KANSAS

SS:
 COUNTY OF SEDGWICK

I, the undersigned, being duly sworn on oath, state that the above and within statement is a true and correct record and log of the well drilled on the location above described to the best of my knowledge and belief.

Subscribed and sworn to before me this 30th day of April 1945.

My commission Expires: