

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-161-20078-00-00
Spot: NENENW Sec/Twnshp/Rge: 29-10S-9E
330 feet from N Section Line, 2310 feet from W Section Line
Lease Name: DOWNEY RANCH, INC Well #: 1
County: RILEY Total Vertical Depth: 1076 feet

Operator License No.: 34178
Op Name: CLARK, DONALD C. DBA CFA OIL CO
Address: PO BOX 252
BONNER SPGS, KS 66012

| String | Size | Depth (ft) | Pulled (ft) | Comments |
|--------|-------|------------|-------------|----------|
| SURF | 8.625 | 158 | | |

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 02/23/2012 11:00 AM
Plug Co. License No.: 34059 Plug Co. Name: HURRICANE SERVICES, INC.
Proposal Rcvd. from: KCC Company: _____ Phone: _____

Proposed Plugging Method: AS PER KCC

Plugging Proposal Received By: PATRICK SHIELDS WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/23/2012 11:00 AM KCC Agent: PATRICK SHIELDS

Actual Plugging Report:

Perfs:

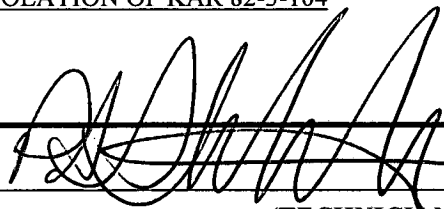
RAN 2" TUBING DOWN TO 1026' (DEPTH OF COLLAPSE). ESTABLISHED CIRCULATION WITH FRESH WATER. MUDDERED UP AND LOADED HOLE. SPOTTED A 35 SX CEMENT PLUG (60 X 40 4% GEL) AT 1026'. PULLED TUBING UP TO 210' AND CIRCULATED CEMENT TO SURFACE. PULLED REMAINING TUBING AND TOP OFF WELL HEAD. CEMENT WAS STANDING APPROX. 4' BELOW THE TOP OF THE SURFACE CASING.

Remarks: SEE EMERGENCY PLUGGING REQUEST - VIOLATION OF KAR 82-3-104

Plugged through: TBG

District: 02

Signed


(TECHNICIAN)

RECEIVED
MAR 06 2012
KCC WICHITA

13/07/12

14