


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-101-30055-00-00 Form CP-4

WELL PLUGGING RECORD

NORTH

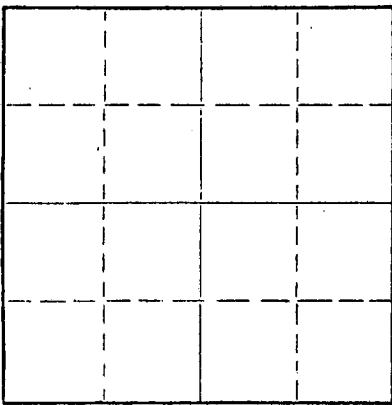

Locate well correctly on above
Section Plat

Lane _____ County. Sec. 7 Twp. 16 Rge. 27 ~~XXXX~~ (W)
Location as "NE/CNW/SW" or footage from lines C NW NW
Lease Owner Cameron Funk etal
Lease Name Gates Well No. 1
Office Address 702 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed November 19 1965
Application for plugging filed November 19 1965
Application for plugging approved November 19 1965
Plugging commenced November 19 1965
Plugging completed November 19 1965
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols, Morland, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4495 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface - Shale	0	100	8 5/8"	95'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug set at 140' with 20 sacks cement.
Plug set at 40' with 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
NOV 30 1965
11-30-1965
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Empire Drilling Company
Address 650 Fourth National Bank Bldg., Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Dan J. Kornfeld (employee of contractor) ~~(owner or operator)~~ contractor of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dan J. Kornfeld
650 Fourth National Bank Bldg., Wichita, Kansas
(Address)

Subscribed and Sworn to before me this 24th day of November, 1965
Sandra Kay Peer
Sandra Kay Peer (Notary Public)



15-101-30055-00-00

L O G

COMPANY: Cameron Funk etal
 CONTRACTOR: Empire Drilling Company
 FARM: Gates #1
 LOCATION: C NW NW Section 7-16-27W, Lane County, Kansas
 COMMENCED: November 7, 1965 ELEVATION: 2529 KB
 COMPLETED: November 19, 1965 POTENTIAL: D & A

0	to	100	Surface-Shale
100	to	975	Shale
975	to	1450	Shale-Gypsum
1450	to	1950	Shale & Sand
1950	to	1956	Redbed
1956	to	1994	Anhydrite
1994	to	2075	Shale & Shells
2075	to	2400	Shale & Salt
2400	to	3880	Lime & Shale
3880	to	3925	Lime & Chert
3925	to	4370	Lime & Shale
4370	to	4410	Chert-Shale-Conglomerate
4410	to	4460	Sand-Chert-Lime
4460	to	4495	Mississippi
4495			Rotary Total Depth

SET: 95' of 8 5/8" with 60 sacks cement.

ELECTRIC LOG TOPS:

Heebner	3756	-1227
Toronto	3774	-1245
Lansing	3793	-1264
Base Kansas City	4115	-1586
Pawnee	4254	-1725
Fort Scott	4307	-1778
Cherokee Shale	4332	-1803
Mississippian	4403	-1874
Log Total Depth	4495	


C E R T I F I C A T I O N

I, Dan J. Kornfeld, do hereby certify that the above and foregoing is a true and correct copy of the log on the Gates #1, C NW NW Section 7-16-27W, Lane County, Kansas, as reflected by the files of Empire Drilling Company.

Dan J. Kornfeld
 Dan J. Kornfeld

Subscribed and sworn to before me, a Notary Public, within and for Sedgwick County, Kansas, this 24th day of November, 1965.

Sandra Kay Peer
 Sandra Kay Peer, Notary Public



RECEIVED
STATE CORPORATION COMMISSION

NOV 30 1965
 11-30-1965
 CONSERVATION DIVISION
 Wichita, Kansas