


15-169-00922-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

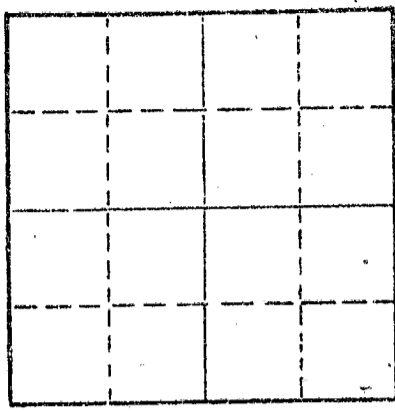

Locate well correctly on above Section Plat

Saline County, Sec. 5 Twp. 16 Rge. 3 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SE SE NW
Lease Owner Tom C. & E. Melva Brown
Lease Name Church Property Well No. 1
Office Address Box 387, Lindsborg, Ks 67456
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed Unknown
Application for plugging filed June 12 1974
Application for plugging approved June 13 1974
Plugging commenced June 26 1974
Plugging completed June 28 1974
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes
Name of Conservation Agent who supervised plugging of this well Mr. Gilbert Toman

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3391 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	Unknown	2019.94

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Rig up and dig out cellar. Filled with sand to 3350' and added 4 sacks of cement to plug to bottom. Put 10' rock bridge at 200' to 190' and added 25 sacks of cement. Put a 10' rock bridge at 40' to 30' and added 10 sacks of cement to plug to surface.

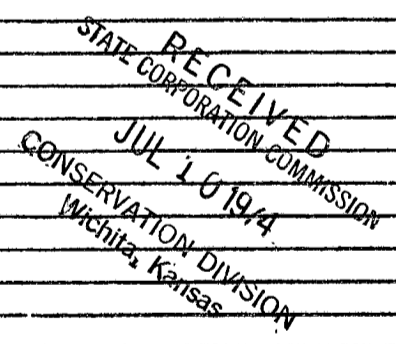

Name of Plugging Contractor THE BUCKEYE CORPORATION
Address Box 1020, El Dorado, Ks 67042


STATE OF KANSAS, COUNTY OF BUTLER, ss.

Charles V. Cross (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Box 1020, El Dorado, Kansas 67042
(Address)

SUBSCRIBED AND SWORN to before me this 9th day of July, 1974

[Signature]
Notary Public.

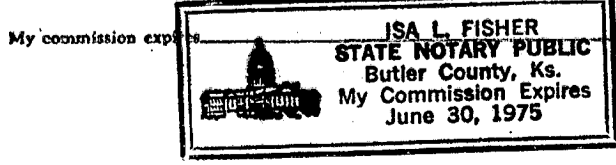

15-169-00922-00-00

LARRY HOWE

#1 GUSTAFSON

5-16-3W
SE SE NW

Contr.

SALINE

County

E 1322 RB

Comm.

Comp.

3-27-53

IP

128 BOPD

Tops	Depth	Datum
MISS	2868	-1546
KIND	3152	-1830
HUNT	3314	-1992
MAQ SH	3336	-2014
MAQ DOL	3388	-2066
TD	3391	-2069

Casing

12" 119

8" 427

4" 3389

DP 3391; ACID 1000, SWB
5 BOPH

SALEMBORG POOL

INDEPENDENT OIL & GAS SERVICE
WICHITA, KANSAS