

SP 52484

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas


WELL PLUGGING RECORD

Saline
Sedgwick

County. Sec. 3 Twp. 16 Rge. 3 W (E) (W)

Location as "NE/CNW&SW" or footage from lines. NE SE SW
Lease Owner Tom Brown
Lease Name Anderson Well No. I
Office Address P.O. Box 387 Lindsborg, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 10-8-1960
Application for plugging filed I-27 19.68
Application for plugging approved I-28 19.68
Plugging commenced I-29 19.68
Plugging completed 2-2 19.68
Reason for abandonment of well or producing formation dry

NORTH

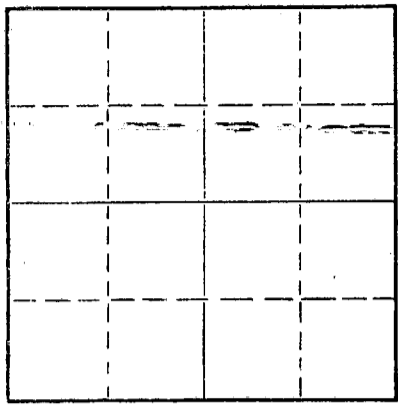

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 3281' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		2,438'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3281' to 3260'. Dumped 5 sx of cement. Mudded hole to 310'. Made 10' of rock bridge. Dumped 20 sx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 sx of cement, filling to the bottom of the celler.

RECEIVED
STATE CORPORATION COMMISSION
FEB 7 - 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Art Lamb Casing Pulling Co.
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas, COUNTY OF Reno, ss.
Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
2809 King St. Hutchinson, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of February, 1968

My commission expires January 5, 1970

[Signature] Notary Public.



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
500 East Murdock, Wichita, Kansas


15-169-19121-00-00
SEC. 3 T. 16 R. 3W
NE SE SW

COPY

Company- TOM BROWN, ET AL
Farm- Anderson No. 1

Total Depth. 3281'
Comm. 9-30-60 Comp. 10-8-60
Shot or Treated.
Contractor, Sterling Drig. CO.
Issued, 1-7-61

County Saline
KANSAS



casing:
8 5/8" 328' cem w/250' ex.
5 1/2" 3277' cem w/75' ex.

Elevation. 1301' RB

Production. 25 BOPD

Figures indicate Bottom of Formations.

shale & shells	330
lime	760
lime & shale	980
shale	1605
shale & lime	1805
lime	1915
shale	2085
shale & lime	2260
lime	2525
lime & shale	2735
shale	2835
lime	3040
shale	3280 RTD
shale	3281

TOTAL DEPTH	
TOPS: SCOUT	
Mississippi	2780
Maquoketa Shale	3209
Maquoketa Dolomite	3276

RECEIVED
STATE CORPORATION COMMISSION
JAN 19 1968
CONSERVATION DIVISION
Wichita, Kansas