

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Ness County, Sec. 4 Twp. 16S Rge. (E) 25W(W)

Location as "NE/CNW/SW" or footage from lines SE 1/4 SE 1/4

Lease Owner Birmingham-Bartlett Drilling Co.

Lease Name Helen Miller Well No. 1

Office Address 300 Kaufman Bldg., Wichita, Kansas, 67202

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed October 20, 19 64

Application for plugging filed December 13, 19 65

Application for plugging approved December 14, 19 65

Plugging commenced December 28, 19 65


Plugging completed December 31, 19 65

Reason for abandonment of well or producing formation Production declined to where well no longer economical to operate.

If a producing well is abandoned, date of last production December 15, 19 65

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

NORTH

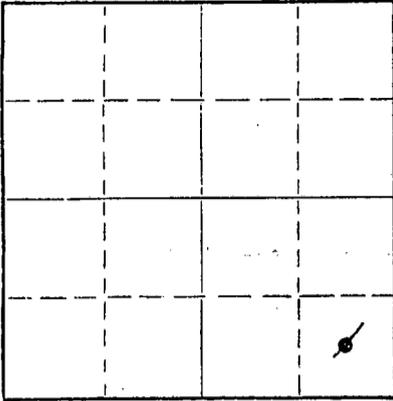

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Leiker

Producing formation Fort Scott Depth to top 4374 Bottom Total Depth of Well 4570 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	251	8-5/8"	251'	None
		0	4472'	4-1/2"	4472'	3241'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Moved in. Rigged up. Cleaned out cellar. Working pipe.

Shot pipe at 3800'. Spotted 80 bbl of oil.

Working pipe.

Pulling pipe. Plugging well. Bailing. Build rock bridge at 250'. Dumped 25 sacks of cement. Filled hole. Capped well with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

JAN 17 1966

CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.
Address P. O. Box 221 Great Bend, Kansas


STATE OF KANSAS COUNTY OF SEDGWICK
Chas. H. Keevert, Prod. Supt. of Birmingham-Bartlett Drilling Co., ss, owner & operator
(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Chas. H. Keevert
Wilson Rd., Route 1, Hutchison, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 31st day of December, 19 65

Vivian F. Yinger
Vivian F. Yinger Notary Public.

My commission expires November 29, 1966.



WELL LOG

135-00343-00-00

COMPANY J. M. Huber Corporation

SEC. 4 T. 16S R. 25W
LOC. SE SE

FARM MILLER NO. 1

RIG. NO. 8

TOTAL DEPTH 4570'


COMM. 10-4-64 COMP. 10-16-64

SHOT OR TREATED

CONTRACTOR Murfin Drilling Company

ISSUED

COUNTRY Ness Co., Ks.
KANSAS



CASING

20 10
15 8 5/8" @ 251' w/200 sacks

12 6

13 5
4 1/2" @ 4472'

ELEVATION

PRODUCTION Oil

FIGURES INDICATE BOTTOM OF FORMATIONS

- 30 Surface Clay
- 60 Sand
- 251 Shale & Shells
- 1405 Shale w/Sand Streaks
- 1680 Sand
- 1900 Red Bed
- 1931 Shale
- 1967 Anhydrite
- 2275 Shale & Shells
- 2540 Shale & Lime
- 2750 Lime & Shale
- 2860 Lime
- 2945 Shale & Lime
- 3570 Lime & Shale
- 3710 Shale & Lime
- 3875 Lime, Shale & Chalk
- 3940 Lime & Chert
- 4325 Lime
- 4392 Lime & Sand
- 4462 Lime
- 4478 Miss. Chert
- 4482 Miss.
- 4500 Lime
- 4570 Miss.
- 4570 RTD

RECEIVED
STATE CORPORATION COMMISSION

JAN 25 1966

CONSERVATION DIVISION
Wichita, Kansas

State of KANSAS

County of SEDGWICK

I, C. Robert Buford of the Murfin Drilling Company

upon oath state that the above and foregoing is a true and correct copy of the log of the Miller #1 well.

MURFIN DRILLING COMPANY

By: C. Robert Buford

C. Robert Buford

Subscribed and sworn to before me this 6th day of November 19 64

My Commission Expires: ADELA MIZENER, Notary Public

My commission expires November 5, 1966

Adela Mizener
NOTARY PUBLIC