

STATE OF KANSAS
STATE CORPORATION COMMISSION

15-135-30399-00-00
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

NESS

County. Sec. 7 Twp. 16S Rge. (E) 25 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. center of SW $\frac{1}{4}$ of SW $\frac{1}{4}$ of NW $\frac{1}{4}$

Lease Owner Jones, Shelburne & Farmer Inc.

Lease Name Bryan Evel

Well No.

Office Address State Capitol Station, Oklahoma City, Okla

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed March 17th 1946

Application for plugging filed March 17th 1946

Application for plugging approved March 17th 1946

Plugging commenced March 18th 1946

Plugging completed March 18th 1946

Reason for abandonment of well or producing formation no trace of oil or gas

If a producing well is abandoned, date of last production never produced 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well H. W. Kerr, Great Bend, Kansas

Producing formation No oil or gas production encountered Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface Clay, Shale	& Shells	0	332'	10 $\frac{3}{4}$ "	332'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud from bottom of pits was pumped into hole through drill pipe. Drill pipe was removed and hole filled up to 300' with heavy mud. Wooden cement retainer was run to top of mud column and 20 sacks of cement mixed and dumped on top of retainer. Hole filled to within 50' of surface with more heavy mud and an additional 15 sacks of cement mixed and used to fill balance of hole and bottom of cellar.

7 16 25 W
+ 7 25

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Jones, Shelburne & Farmer, Inc
Address State Capitol Station, Oklahoma City, Oklahoma.

STATE OF Kansas, COUNTY OF Barton, ss.

John O. Farmer (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)


John O. Farmer
Box 659 - Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 12th day of April

My commission expires July 9, 1947

21-543-s 8-45-6M

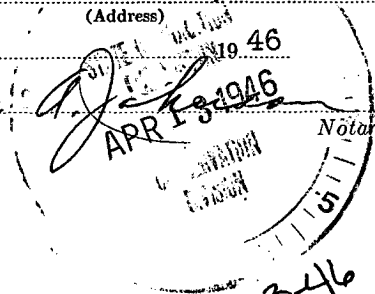

Notary Public.

CP-4

4-13-46

WELL RECORD

Operator: Jones-Shelburne, Inc. Address: c/o State Capitol Station
 Oklahoma City, Oklahoma
 County: Ness Section 7-16-25
 Lessor: Evel Well No. 1
 Elevation: 2533'
 Drilling Commenced: February 24, 1946 Drilling Completed: March 17, 1946

PIPE RECORD

10-3/4" 332'

GEOLOGICAL TOPS

Anhydrite (Drillers' top)	1965
Ft. Riley	2710
Base Florence Flint	2820
Neva	3050
Howard	3410
Topeka	3540
Lansing-Kansas City	3869
Base Kansas City	4153
Marmaton Lime (Ft. Scott)	4369
Conglomerate	4435
Top Mississippi Lime	4494
Top Dolomite	4508
T.D.	4523

COUNTY OF OKLAHOMA)
) SS
 STATE OF OKLAHOMA)


I, Sam P. Shelburne, Secretary-Treasurer of Jones-Shelburne, Inc., do hereby accept and affirm that the within Driller's Well Log and Time Log attached hereto are a true and correct copy of the records of the Evel Well drilled in C SW $\frac{1}{4}$ SW $\frac{1}{4}$ NW $\frac{1}{4}$ Section 7-16S -25W, Ness County, Kansas.

PLUGGING
 FILE SEC-7-16R-25W
 BOOK PAGE 47 LINE 251

Sam P. Shelburne
 Sam P. Shelburne
 Secretary-Treasurer
 Jones-Shelburne, Inc.

Subscribed and sworn to and before me this 29 day of March, 1946.

My commission expires 3-8-47.

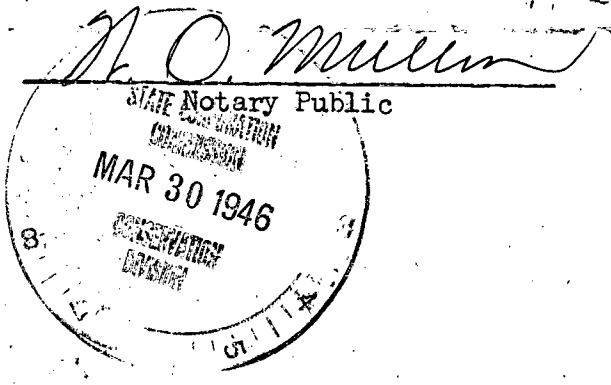

FORMATION RECORD

Surface Clay & Shale	0	193
Shale & Sand	123	300
Shale & Shells	300	375
Shale	375	460
Shale & Shells	460	705
Sand & Shells	705	770
Shale & Shells	770	840
Sand	840	970
Sand & Shells	970	1050
Shale & Shells	1050	1162
Sand	1162	1190
Shale & Lime	1190	1220
Shale & Lime Shells	1220	1235
Red Rock & Shale	1235	1360
Anhydrite	1360	1375
Shale & Shells	1375	1440
Red Rock, Shale & Shells	1440	1520
Sand, Shells, Streaks of Shale	1520	1695
Shale & Streaks Sand	1695	1730
Shale, Red Bed, & Shells	1730	1860
Red Bed, Shale & Lime	1860	1965
Anhydrite	1965	1975
Anhydrite	1975	1995
Red Bed & Shells	1995	2085
Shale & Shells	2085	2145
Red Rock, Shale & Streaks Lime	2145	2300
Lime	2300	2330
Shale & Lime	2330	2405
Shale - Gray	2405	2430
Shale & Shells	2430	2510
Shale & Lime	2510	2580
Sandy Lime & Shale	2580	2685
Shale & Shells	2685	2720
Lime	2720	2790
Sandy Lime (Ft. Riley)	2790	2835
Lime & Shale	2835	2875
Lime & Shale	2875	3958
Lime	3958	4020
Shale	4020	4063
Shale & Lime	4063	4103
Shale & Lime	4103	4310
Shale	4310	4325
Shale & Lime	4325	4472
Chesty Lime & Shale	4472	4490
Lime & Shale	4490	4499
Lime	4499	4523
Total Depth	4523	

Dry and abandoned

