

15-169-20082-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Saline County, Sec 27 Twp 16 Rge 3 W(E) (W)

Location as "NE/CNW/SW" or footage from lines 130 - E W/L 850'S N/L NW/4

Lease Owner Decker Petroleum Inc.

Lease Name Willard Lundquist Well No. 1

Office Address P.O. Box 352 Canton, Kansas 67428

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed 12-14 1977

Application for plugging filed 10-26 1978

Application for plugging approved 10-27 1978


Plugging commenced 10-30 1978

Plugging completed 11-2 1978

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

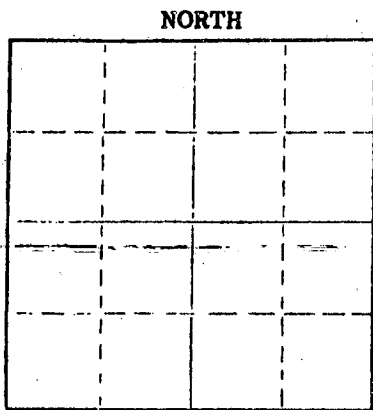

Name of Conservation Agent who supervised plugging of this well Gilbert Toman  
Producing formation Depth to top Bottom Total Depth of Well 3410' Feet  
Show depth and thickness of all water, oil and gas formations.

Table with columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Includes entry for 4 1/2" size and 2816' pulled out.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3410' to 3350'. Dumped 3 sx of cement. Mudded hole to 265'. Made 10' of rock bridge. Dumped 2 sx cement. Dumped 3 1/2 Yrds. of Ready-Mix cement, filling to the bottom of the cellar.

Name of Plugging Contractor Art Lamb Casing Pulling Inc.  
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas COUNTY OF Reno ss. Art Lamb

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb

2809 King St. Hutchinson, Kansas 67501


Subscribed and sworn to before me this 3rd day of November 1978

My commission expires April 18, 1982

RECEIVED STATE CORPORATION COMMISSION Notary Public.

NOV - 6 1978

CONSERVATION DIVISION Wichita, Kansas





15-169-200.82-00-00

# Blackstone Drilling, Inc.

Box 1558 • 523 West Kansas • Phone (316) 241-1250  
1184  
McPHERSON, KANSAS 67460

McPherson, Kansas  
December 15, 1977

COMPANY: DECKER PETROLEUM INC.  
 CONTRACTOR: BLACKSTONE DRILLING, INC.  
 FARM: WILLARD LUNDQUIST #1  
 LOCATION: 1150' EWL & 850' SNL NW/4 27-16-3W,  
 Saline County, Kansas  
 COMMENCED: December 7, 1977  
 COMPLETED: December 14, 1977  
 ELEVATION:

0	to	70	Shale
70	to	210	Blue Shale
210	to	235	Shale
235	to	338	Anhydrite
338	to	460	Shale & Lime
460	to	955	Lime & Shale
955	to	1420	Shale & Lime
1420	to	1860	Lime & Shale
1860	to	2555	Shale & Lime
2555	to	2874	Lime
2874	to	3175	Mississippi
3175	to	3305	Shale
3305	to	3410	Shale & Lime
		3410	T. D.

RECEIVED  
STATE CORPORATION COMMISSION

OCT 27 1978

CONSERVATION DIVISION  
Wichita, Kansas

Cut 12 1/2" hole to 338' and run 341' of 8 5/8" surface pipe, cemented with 100 sacks of cement at 338'. Plug down at 7:00 P. M., December 8, 1977. Run 3415 of 4 1/2" pipe, cemented with 75 sacks of cement at 3405, 5 feet off bottom. Plug down at 4:30 P. M., December 14, 1977.

TOPS: MISSISSIPPI - 2874'

Measurements taken from K. B.

### CERTIFICATE

I, P. E. Plouffe, President of Blackstone Drilling, Inc. do hereby certify that the above and foregoing is a true and correct copy of log on your Willard Lundquist #1, located on the 1150' EWL & 850' SNL NE/4 Section 27-16-3W, Saline County, Kansas as reflected by the files of Blackstone Drilling, Inc.

P. E. Plouffe, President

Subscribed and sworn to before me a Notary Public in and for McPherson County, Kansas this 15th day of December, 1977.

Johnnie L. Schmidt - Notary Public

