

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-135-22409-00-00  
Spot: CSWSWSE Sec/Twnshp/Rge: 16-16S-25W  
330 feet from S Section Line, 2310 feet from E Section Line  
Lease/Unit Name: HUX-WFU Well Number: 1  
County: NESS Total Vertical Depth: 4650 feet

Operator License No.: 31627  
Op Name: WHITETAIL CRUDE, INC  
Address: N HWY 283 PO BOX 544  
NESS CITY, KS 67560

Conductor Pipe: Size feet: 8151.13  
Surface Casing: Size 8.625 feet: 330 WITH 225 SX CMT  
Production: Size 4.5 feet: 4649 WITH 125 SX CMT  
Liner: Size feet:

Well Type: WSW UIC Docket No: Date/Time to Plug: 01/31/2003 10:00 AM  
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.  
Proposal Rcvd. from: MIKE Company: SWIFT SERVICES Phone: (785) 798-2300

Proposed Plugging Method: SAND TO 3855' WITH 4 SX CMT. PLUG AT 820' WITH 80 SX CMT. PLUG AT 350' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: Plugging Operations 100% Witnessed (Complete)  
Date/Time Plugging Completed: 01/31/2003 11:40 AM KCC Agent: MICHAEL MAIER

Actual Plugging Report:


PBTD 4454'. PERFS AT 4446-50 & 4054-66'. CIBP @ 4200'. SAND TO 3855' WITH 4 SX CMT ON TOP. 1ST PLUG AT 820' WITH 80 SX CMT. 2ND PLUG AT 350' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

RECEIVED  
FEB 07 2003  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES. RECOVERED 823' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

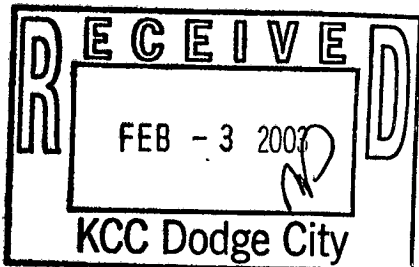

Signed Michael J. Maier  
(TECHNICIAN)

INVOICED

DATE 2-10-03

INV. NO. 2003061178