

15-135-21506-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Ness County. Sec. 15 Twp. 16S Rge. 25W E/W  
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines  
NE SE NW


Lease Owner Palomino Petroleum  
Lease Name Smith Well No. #1  
Office Address 500 Insurance Building; Wichita, Kansas 67202  
Character of Well (Completed as Oil, Gas or Dry Hole) dry hole

Date Well completed August 29, 1978 19  
Application for plugging filed August 29, 1978 19  
Application for plugging approved August 29, 1978 19  
Plugging commenced August 29, 1978 19  
Plugging completed August 29, 1978 19

Reason for abandonment of well or producing formation dry hole  
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Cleo Massey  
Producing formation Depth to top Bottom Total Depth of Well 4580'  
Show depth and thickness of all water, oil and gas formations.

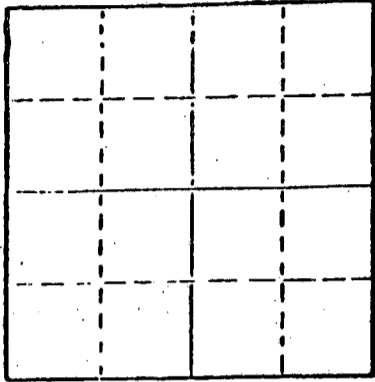

Locate well correctly on above Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set. Hole plugged with 50-50 pozmix, 6% gel, as follows: 70 sacks @ 825', 20 sacks @ 240', hulls and 10 sacks @ 40'. Plugging completed at 10:15 p.m., August 29, 1978.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Strata Drilling Company

STATE OF KANSAS COUNTY OF BARTON, ss.  
Kenneth J. Link (~~employee~~ owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Kenneth J. Link President  
P. O. Box 355, Great Bend, Kansas 67530  
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of September, 1978

Loneita Barry  
Loneita Barry Notary Public.

My commission expires 3-28-80



RECEIVED  
STATE CORPORATION COMMISSION

SEP 27 1978

CONSERVATION DIVISION  
Wichita, Kansas

15-135-21506-00-00

D R I L L E R S   L O G

#1 Smith

CASING RECORD:  
8 jts. new 20#  
8-5/8" surface  
casing

COMPANY: Palomino Petroleum  
CONTRACTOR: Strata Drilling Company  
COMMENCED: August 23, 1978  
COMPLETED: August 29, 1978

DESCRIPTION: NE SE NW  
Section 15-16S-25W  
Ness County, Kansas  
ELEVATION: 2574' KB

TOTAL ROTARY  
DEPTH: 4580'

D & A

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Post rock, shale	0	335	Ran 320' new 20# 8-5/8" surface casing; set and cemented at 325' with 200 sacks common cement, 2% gel, 3% C.C.; cement circulated. Plug down 8:15 p.m., August 23, 1978.
Shale, sand	335	1971	
Anhydrite	1971	2006	
Shale	2006	2650	
Lime and shale	2650	4425	
Lime	4425	4530	Ran 2 DST.
Lime and shale	4530	4580	
			Ran 1 electric log
			Hole plugged with 50-50 pozmix, 6% gel as follows: 70 sacks @ 825', 20_sacks @ 240', hulls and 10 sacks @ 40'. Plugging completed at 10:15 p.m., August 29, 1978.

STATE OF KANSAS )  
                          ) ss  
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

*Kenneth J. Link*  
Kenneth J. Link, President

Sworn to and subscribed before me this 11th day of September, 1978.

My appointment expires 3-28-80.

*Loneita Barry*  
Loneita Barry, Notary Public

RECEIVED  
STATE CORPORATION COMMISSION  
SEP 27 1978  
CONSERVATION DIVISION  
Wichita, Kansas

