


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

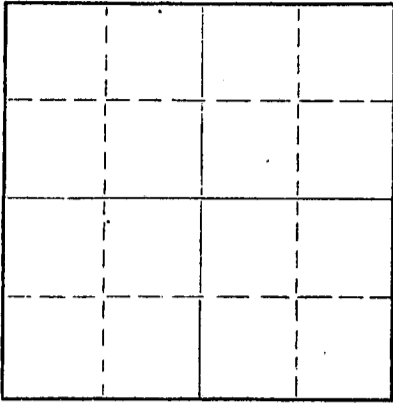

Locate well correctly on above
Section Plat

Ness County, Sec. 26 Twp. 16 Rge. (EX 25) (W)

Location as "NE/CNWxSWx" or footage from lines NW SW NW
Lease Owner Sohio Petroleum Company
Lease Name Drake Well No. 3
Office Address Box 673, Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 4-2 19 46
Application for plugging filed 8-24 19 65
Application for plugging approved 8-27 19 65
Plugging commenced 9-25 19 65
Plugging completed 9-28 19 65
Reason for abandonment of well or producing formation Uneconomical

If a producing well is abandoned, date of last production August 19 64
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Mississippi Depth to top _____ Bottom _____ Total Depth of Well 4543 Feet
Show depth and thickness of all water, oil and gas formations. P B T D 4523 Feet

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4	300'	--
				5-1/2	4,540'	2,777'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dumped sand to 4,405 with 4 sacks cement on top.
Set plug at 290' with 35 sacks cement.
Mud to 30'; ran 15 sacks cement to bottom of cellar.

RECEIVED
STATE CORPORATION COMMISSION

SEP 30 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Knight Casing Pulling Company
Address Chase, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
D. W. Smith (employee of owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) D. W. Smith

(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of September, 19 65

My commission expires November 18, 1967

Deanne Becker
Notary Public.



15-135-00024-00-00

E. H. Drake #3

Drilled by Harbar Drilling Company

Completed: 4-2-46

TD: 4543 Elevation: 2567

PBTD: 4523 7 7/8" hole

Casing Record:

10 3/4", 32.75#, KW set at 300' DF with 250 sacks

5 1/2", 15 1/2" and 17# KW and SS - Set at 4540 with 175 sacks

Perforations:

4432-36, 4436 1/2 - 4446 1/2, 4447-4452

Plug set at 4523

RECEIVED
STATE CORPORATE COMMISSION
AUG 27 1965
CONSERVATION DIVISION
Wichita, Kansas