


15-169-19150-00-00
Form CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Saline County. Sec. 15 Twp. 16 Rge. 3 (E) W
SE SW NE

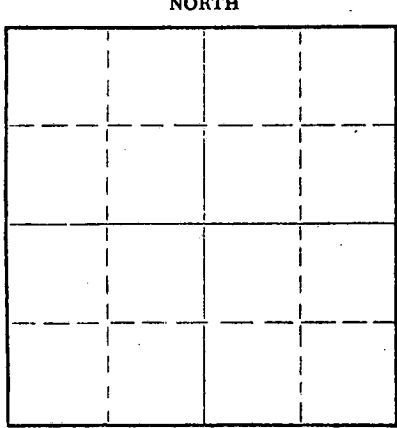

Location as "NE/CNW\SW\W" or footage from lines _____
Lease Owner W-D Oil Co.
Lease Name Miller Well No. 1
Office Address P. O. Box 296, Burlington, KColo.
Character of Well (completed as Oil, Gas or Dry Hole) Gas Oil TDKC
Date well completed Oct. 23 19 59
Application for plugging filed June 11 19 68
Application for plugging approved June 12 19 68
Plugging commenced June 17 19 68
Plugging completed June 21 19 68
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Tomah
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled back with sand to 3300'. Dumped 5 sacks of cement. Shot pipe
2805.70'. Pulled pipe and mudded hole to 310'. Set rock
off at
bridge at 310' to 300'. Dumped 25 sacks of cement. Finished
mudding hole and dumped 10 sacks of cement at base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
JUL 16 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Bert Self
Address Hutchinson, Kans.

STATE OF Kans. COUNTY OF Reno, ss. _____
Employee (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bert Self

R. R. #4, Hutchinson, Kans.

Subscribed and Sworn to before me this 15th day of July, 19 68
Dorothy Self
Notary Public.



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock,

Wichita, Kansas

COPY


15-169-19150-00-00

Company. KREBBS & REESE
 Farm. Miller No. 1

SEC. 15 T. 16 R. 3W
 SE SW NE

Total Depth. 3327'
 Comm. 10-16-59 Comp. 10-23-59
 Shot or Treated.
 Contractor. Melland Drig. Co.
 Issued. 1-23-60

County Saline
 KANSAS



Elevation. 1324' RB

Production. 188 BOPD

CASING:

8 5/8" 326' cem w/220 sx.
 5 1/2" 3323' cem w/50 sx.

Figures Indicate Bottom of Formations.

surface soil & clay	40
sand	100
shale & shells	255
shale, gypsum & lime	326
Anhydrite	395
shale, redbed & shells	485
lime & shale	950
shale & shells	1835
lime & shale	2903
Mississippi lime	3090
shale w/lime	3125
shale	3327 RTD
Total Depth	

TOPS: SCOUT	
Mississippi	2848
Kinderhook	3092
Maquoketa	3323

RECEIVED
 STATE CORPORATION COMMISSION
 JUN 12 1968
 CONSERVATION DIVISION
 Wichita, Kansas