

15-101-20162-00-00


FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Lane _____ County, Sec. 15 Twp. 16S Rge. 28 (W)
SW NW

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner TGT Petroleum Corporation
Lease Name PEARSON Well No. #1
Office Address 209 E. William, Wichita, Ks. 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 29, 1976
Application for plugging filed (verbal) January 29, 1976
Application for plugging approved (verbal) January 29, 1976
Plugging commenced January 29, 1976
Plugging completed January 29, 1976
Reason for abandonment of well or producing formation No commercial quantity of oil or gas encountered.

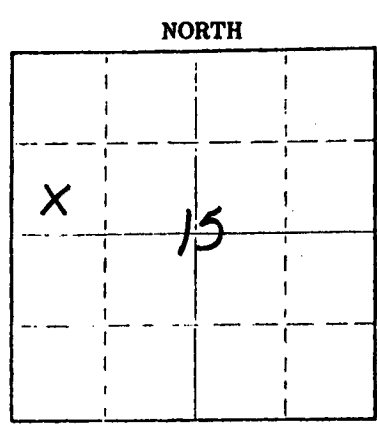

Locate well correctly on above Section Plot

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4497'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	224.76'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st Plug was Set @ 750' with 70 sx. cement
2nd Plug was Set @ 200' with 20 sx. cement
3rd Plug was Set @ 40' with 10 sx. cement
Plug was down @ 6:30 a.m. January 29, 1976

RECEIVED
STATE CORPORATION COMMISSION
FEB 3 1976
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Abercrombie Drilling, Inc.
Address 801 Union Center, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK SS.
Jerry A. Langrehr-Exec. V.P. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jerry A. Langrehr
801 Union Center, Wichita, Ks. 67202
(Address)

Subscribed and Sworn to before me this 2nd day of February, 1976
July 21, 1979
Sandra Richman
Notary Public.



CONTRACTOR'S WELL LOG

15-101-20162-00-00

OPERATOR: TGT Petroleum Corporation
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: PEARSON #1
 LOCATION: SW NW Section 15-16S-28W
 Lane County, Kansas
 SPUD DATE: January 16, 1976
 COMPLETION DATE: January 29, 1976

0	180	Top soil & sand
180	325	Shale
325	1275	Sand & shale
1275	2056	Shale
2056	2091	Anhydrite
2091	2490	Sand & shale
2490	2994	Shale
2994	3635	Shale & Lime
3635	3737	Lime
3737	3940	Lime & shale
3940	4497	Lime
	4497	Rotary Total Depth

RECEIVED
 STATE CORPORATION COMMISSION

FEB 3 1976

CONSERVATION DIVISION
 Wichita, Kansas

Drilled 225' of 12 1/4" hole. Ran 6 jts. 216.76' of 8 5/8" surface, Set @ 224.76' Cemented with 165 sx. Cement, 2% gel, 3% ca. cl. Cement circulated. Plug was down @ 3:00 p.m. January 16, 1976.

Plugged and Abandoned: 1st Plug was Set @ 750' with 70 sx. cement; 2nd Plug was Set @ 200' with 20 sx. cement; 3rd Plug was Set @ 40' with 10 sx. cement. 50/50 Posmix, 6% gel. Plug was down @ 6:30 a.m. January 29, 1976. State Plugger: Gilbert Balthazor

SAMPLE TOPS:

Anhydrite 2056'
 B/Anhydrite 2091'


STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Jerry A. Langrehr, Executive Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the Pearson #1, SW NW Section 15-16S-28W, Lane County, Kansas.

ABERCROMBIE DRILLING, INC.

By: Jerry A. Langrehr
 Jerry A. Langrehr-Exec. V.P.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 2nd day of February, 1976.



Sandra Richman
 Sandra Richman-Notary Public