15-101-20035-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

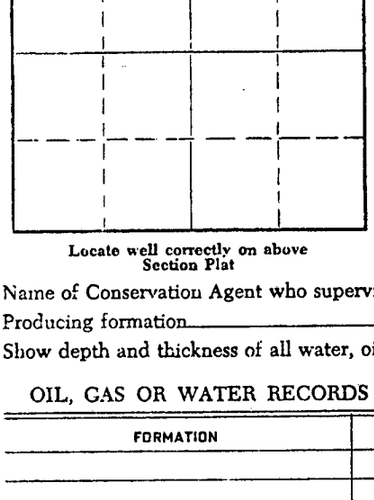

Locate well correctly on above Section Plat

Lane County. Sec. 13 Twp. 16S Rge. (E) 28 (W)

Location as "NE/CNW¼SW¼" or footage from lines app. SW SW SE

Lease Owner Oasis Petroleum, Inc.

Lease Name Bentley Well No. 1

Office Address 800 Sutton Place, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed May 10 1972

Application for plugging filed May 10 1972

Application for plugging approved May 10 1972

Plugging commenced May 10 1972

Plugging completed May 10 1972

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well by Don Truan for Bill Nickols

Producing formation Depth to top Bottom Total Depth of Well 4550 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS — CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	258'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug @ 1400' with 100 sacks; 2nd plug @ 250' with 25 sacks; 3rd plug @ 40' with 10 sacks. Plugging completed at 11:30 p.m. 5-10-72.

RECEIVED
STATE CORPORATION COMMISSION
MAY 16 1972
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.

Address 830 Sutton Place, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Jack G. Paulsen (~~employee of owner~~) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack G. Paulsen

Jack G. Paulsen
800 Sutton Place, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of May, 1972.

Jean S. Taylor
Jean S. Taylor Notary Public.

My commission expires June 28, 1974.

15-101-20035-00-00

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

BENTLEY #1
SW SW SE, Sec. 13-16S-28W
Lane County, Kansas

Commenced: April 27, 1972
Completed: May 10, 1972

OPERATOR: OASIS PETROLEUM, INC.

Depth From	Depth To	Formation	Remarks
0	45	Rock	Ran 6 double joints of used 28#
45	260	Shale-shells-sand	8 5/8" csg set @ 258' cemented w/
260	665	Shale	150 sks common 3% CC
665	727	Sand	P.D. @ 11:30 PM 4/28/72
727	785	Shale	Cement Circ.
785	940	Shale-shells	
940	1010	Sand	
1010	1610	Shale	
1610	1820	Sand	
1820	2035	Shale-redbed	
2035	2073	Anhydrite	
2073	2205	Redbed-shale	
2205	2495	Shale	
2495	2655	Lime-shale	
2655	2845	Shale-lime	
2845	3855	Lime-shale	
3855	3923	Lime-chert	
3923	4488	Lime	
4488	4510	Sand-lime	
4510	4546	Lime-chert	
4546	4550	Lime	
4550		TD	DRY AND ABANDONED

RECEIVED
STATE CORPORATION COMMISSION
MAY 16 1972
CONSERVATION DIVISION
Wichita, Kansas

I, James S. Sutton, II, certify this is a correct copy of the Drillers' Log for the well drilled in the SW SW SE, Section 13-16S-28W, Lane County, Kansas, to the best of my knowledge and belief.

James S. Sutton, II

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 12th day of May, 1972, personally appeared James S. Sutton, II, to me persoanlly known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

Marjorie Hall, Notary Public

My Commission expires
November 29, 1975.