


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Ness County. Sec. 17 Twp. 16S Rge. 25W (E) (W)

Location as "NE/CNW&SW&" or footage from lines C SE NE
Lease Owner Okmar Oil Company
Lease Name Wheat Well No. 1
Office Address 1130 Vickers-KSB&T Bldg., Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed May 4 19 74
Application for plugging filed May 4 19 74
Application for plugging approved May 4 19 74
Plugging commenced May 4 19 74
Plugging completed May 4 19 74
Reason for abandonment of well or producing formation D & A

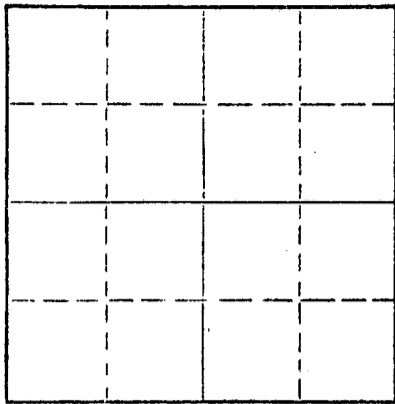

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well. 4,593 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	297.41'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st Plug @ 800' w/70 sx.
2nd Plug @ 250' w/20 sx.
1/2 sk. hulls & Plug @ 40' w/10 sx. to surface.
Cmt. was 50-50 pozmix, 6% total gel.

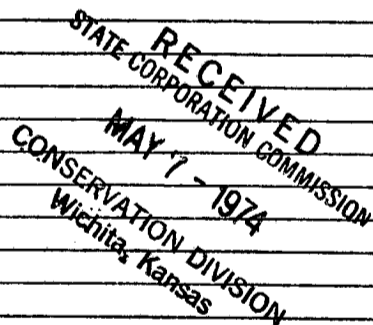

Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Linda H. Dickens (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Linda H. Dickens
1720 Wichita Plaza, Wichita, Kansas 67202
(Address)

Subscribed and sworn to before me this 6th day of May, 19 74



October 25, 1976
Gloria Fawcett
Notary Public.

DRILLERS LOG

No. 1 Wheat

CASING RECORD:

8-5/8" @ 297.41'
w/200 sx cmt

TOTAL DEPTH: 4,593'

COMPANY: Okmar Oil Co.

CONTRACTOR: Red Tiger Drilling Co.

COMMENCED: April 24, 1974

COMPLETED: May 4, 1974

DESCRIPTION:

C SE NE
17-16S-25W
Ness County,
Kansas

ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>
Surface Soil, Clay, Shale	0	410
Shale & Shells	410	1345
Shale, Sand, Shale	1345	1790
Redbed	1790	1997
Anhydrite	1997	2031
Shale	2031	2155
Shale, Lime Streaks	2155	2485
Lime & Shale	2485	3895
Lime	3895	4593

REMARKS

RECEIVED
STATE CORPORATION COMMISSION
MAY 7 - 1974
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Linda H. Dickens
Linda H. Dickens

Subscribed and sworn to before me this 6th day of May, 1974.

Gloria Lawcett
Notary Public



Commission Expires:
October 25, 1976