

15-135-20293-00-00

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Ness County, Sec. 19 Twp. 16 Rge. 25W (E) (W)

Location as "NE/CNW%SW%" or footage from lines. Approx. C NW NE

Lease Owner Thunderbird Drilling, Inc.

Lease Name Horacek Well No. 1

Office Address 400 N. Woodlawn, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed October 26 1969

Application for plugging filed October 26 1969

Application for plugging approved October 26 1969


Plugging commenced October 26 1969

Plugging completed October 26 1969

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

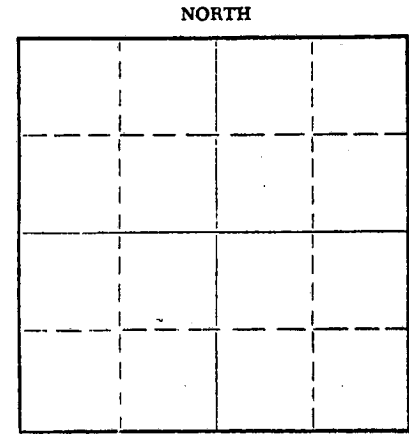

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 4565 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	333'	-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill hole with heavy mud to 900' of surface, set plug and 70 sacks cement. Mud to 300', plug and 20 sacks cement. Mud to 40', plug and 10 sacks cement. Cement pumped with Globe Cementing pump truck

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 28 1969  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor

Address

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Don Gardner (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature)

300 Schweiter Building, Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of October, 1969

My commission expires December 14, 1969



Notary Public signature

Notary Public

DRILLERS LOG

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 31 1969  
CONSERVATION DIVISION  
Wichita, Kansas

#1 HORACEK  
Approx. C NW NE Section 19-16S-25W  
Ness County, Kansas

OPERATOR: Thunderbird Drilling, Inc.  
400 N. Woodlawn  
Wichita, Kansas 67208

CONTRACTOR: Dunne-Gardner Petroleum, Inc.  
300 Schweiter Building  
Wichita, Kansas 67202

COMMENCED: October 14, 1969

COMPLETED: October 26, 1969

CASING RECORD: 8-5/8" @ 333' w/200 sx

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	335	Clay, shells, shale
335	874	Shale and shells
874	955	Sand
955	1290	Shale and lime streaks
1290	1785	Shale, shells, sand
1785	2410	Shale and lime
2410	2755	Broken lime
2755	3045	Shale and lime
3045	3195	Lime
3195	3515	Lime and shale
3515	3625	Lime and shale streaks
3625	3798	Lime and shale
3798	4565	Lime
4565		Rotary Total Depth

STATE OF KANSAS )  
                          ) ss  
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct log to the best of my knowledge and belief.

DUNNE-GARDNER PETROLEUM, INC.  
  
Don Gardner

Subscribed and sworn to before me this 29th day of October, 1969.

My commission expires:  
December 14, 1969

  
Notary Public