


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

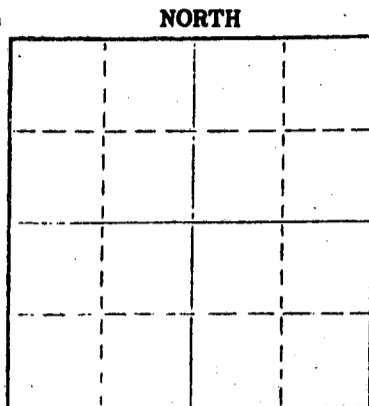

Locate well correctly on above Section Plat

Ness County. Sec. 20 Twp. 16S Rge. (E) 25 (W)  
Location as "NE/CNW&SW¼" or footage from lines. C SW NE  
Lease Owner. Petroleum, Inc.  
Lease Name. Michaelis 'B' Well No. 4  
Office Address. 300 W. Douglas, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 2-24 1976  
Application for plugging filed 2-24 1976  
Application for plugging approved 2-24 1976  
Plugging commenced 2-24 1976  
Plugging completed 2-24 1976  
Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4573  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Water	Surface	346	8-5/8"	339	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Fluid to 720', plug, 70 sx cement;  
Fluid to 240', plug, 20 sx cement;  
Fluid to 40', plug, 1/2 sx hulls, 10 sx cement

RECEIVED  
STATE CORPORATION COMMISSION  
3-2-76  
MAR 02 1976

Name of Plugging Contractor D N B DRILLING, INC.  
Address 701 First National Building  
Wichita, Kansas 67202  
STATE OF KANSAS COUNTY OF \_\_\_\_\_ ss.

JAMES L. DONELSON (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson  
701 First Nat'l Bldg., Wichita, Ks.  
(Address)

Subscribed and sworn to before me this 26th day of Feb. 1976

My commission expires 8-25-76

Ella Priess  
Ella Priess Notary Public.

Ella Priess  
STATE NOTARY PUBLIC  
Sedgwick County, Kansas  
My Com. Expires Aug. 25, 1976

DRILLERS' LOG

PETROLEUM, INC.  
No. 4 Michaelis 'B'  
C SW NE, Sec. 20-16-25W  
Ness County, Kansas

Elev: 2594 K.B.

Commenced: 2-13-76  
Completed: 2-24-76

Surface Casing: 339' of  
8-5/8" cemented w/200 sx  
common cement, 2% Gel, 3%  
cc. 2-13-76

FORMATION

DEPTH

Surface Hole	0 - 346
Shale	346 - 825
Sand	825 - 1075
Sand & Shale	1075 - 1360
Blaine Anhydrite	1360 - 1373
Sand & Shale	1373 - 1785
Shale & Red Bed	1785 - 1969
Anhydrite	1969 - 2007
Shale	2007 - 2245
Shale & Lime	2245 - 2845
Lime & Shale	2845 - 3825
Lime	3825 - 4573 RTD

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

*James L. Donelson*  
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 26th day of February 1976.

*Ella Priess*  
Ella Priess, Notary Public

1976 FEB 26  
3-2-76

*Ella Priess*  
STATE NOTARY PUBLIC  
Sedgwick County, Kansas  
My Com. Expires Aug. 25, 1976