

15-101-20286-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Lane _____ County. Sec. 14 Twp. 17 Rge. 27 ~~E~~/W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines _____
C NE NW

Lease Owner Bass Enterprises Production Company
Lease Name Hagan Well No. 1
Office Address P. O. Box 2760, Midland, Texas 79702
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry Hole _____

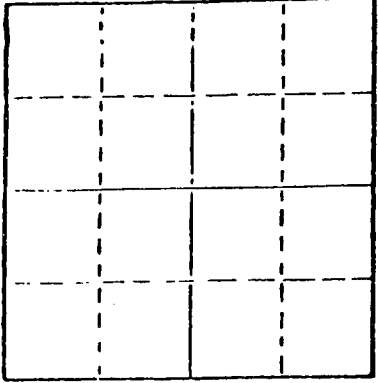

Locate well correctly on above
Section Plot

Date Well completed 2/18/78 19
Application for plugging filed 2/18/78 19
Application for plugging approved 2/18/78 19
Plugging commenced 2/18/78 19
Plugging completed 2/18/78 19
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes _____

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4539
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	324	8-5/8	yes	no

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Bottom plug at 700' with 70 sacks 50-50 Poz, 6% gel
Second plug at 300' with 20 sacks 50/50 Poz 6% gel
Solid bridge at 40' with 10 sacks 50/50 Poz 6% gel
2 sacks in rathole
Job complete at 7 a.m. 2/19/78

RECEIVED
STATE CORPORATION COMMISSION
MAR 06 1978

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Slawson Drilling Company, Inc.


STATE OF Kansas COUNTY OF Sedgwick, ss.
James C. Remsberg (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James C. Remsberg
James C. Remsberg
200 Douglas Building, Wichita 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 4 day of March, 1978

Mary Lou Taylor
Mary Lou Taylor Notary Public.

My commission expires January 17, 1981



DRILLERS LOG

15-101-20286-00-00

OPERATOR: Bass Enterprises Production Company
P. O. Box 2760
Midland, Texas 79702

LEASE: Hagan No.1
C NE NW Sec. 14-17S-27W
Lane County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
200 Douglas Building
Wichita, Kansas 67202

COMMENCED: 2/6/78

COMPLETED: 2/18/78

RTD: 4539'

CASING: 8-5/8 set at 321' with 225 sx cement

0' to 324' 12 1/4" Surface Hole
324' to 476' Shale & Shells
476' to 1250' Shale & Sand
1250' to 1502' Shale & Shells
1502' to 1689' Sand
1689' to 1864' Shale
1864' to 1966' Shale & Shells
1966' to 2025' Anhydrite
2025' to 2294' Shale & Shells
2294' to 2980' Shale
2980' to 3139' Shale & Lime
3139' to 3284' Lm & Shale
3284' to 3475' Shale & Lm
3475' to 3675' Shale
3675' to 3815' Lm
3815' to 3920' Shale & Lime
3920' to 3999' Lime
3999' to 4065' Lime & Shale
4065' to 4220' Lime
4220' to 4390' Lime & Shale
4390' to 4539' Lime
4539' RTD

STATE OF KANSAS

COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc. hereby state the above is a correct copy of the Hagan No. 1 well.

James C. Remsberg
James C. Remsberg

Subscribed and sworn to me this 4th day of March, 1978

Mary Lou Taylor
Mary Lou Taylor, Notary

My commission expires January 17, 1981

RECEIVED
STATE COMMISSIONER OF GEOLOGY

MAR 06 1978

Wichita, Kansas

