

15-101-20059-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

Lane \_\_\_\_\_ County. Sec. 13 Twp. 17S Rge. 27 (W)

Location as "NE/CNW/SW" or footage from lines SW NW SW

Lease Owner Thunderbird Drilling, Inc.

Lease Name Douglas Well No. 1

Office Address 4328 E. Kelloqq, Wichita, Kansas 67218

Character of Well (completed as Oil, Gas or Dry Hole) D&A

Date well completed 6/12 1973

Application for plugging filed 6/12 1973

Application for plugging approved 6/12 1973

Plugging commenced 6/12 1973


Plugging completed 6/12 1973

Reason for abandonment of well or producing formation D&A

STATE REC

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes.

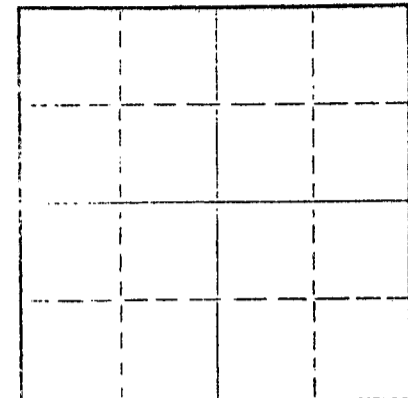

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4580 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	389'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Hole plugged w/posmix cmt. w/6% gel.

110 cu. ft. @ 825'

30 cu. ft. @ 400'

Bridged hole @ 40' w/1/2 sx hulls & plug

10 cu. ft. cmt. to surface.

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 20 1973  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Co.

Address 1720 Wichita Plaza, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.

Linda Mowrey (employee of owner) or (owner or operator) of the above-described

sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the

above described well as filed and that the same are true and correct. So help me God.

(Signature) Linda Mowrey

1720 Wichita Plaza, Wichita, Kansas 67202

(Address)

and SWORN to before me this 15th day of June, 1973

Linda H. Dickens

Notary Public.

My commission expires March 8, 1977



15-101-20059-00-00

DRILLERS LOG

No. 1 Douglas

CASING RECORD:

8-5/8" @ 389'  
w/225 sx cement

TOTAL DEPTH: 4580'

COMPANY: Thunderbird Drilling, Inc.

CONTRACTOR: Red Tiger Drilling Co.

COMMENCED: 5/31/73

COMPLETED: 6/12/73

DESCRIPTION:

SW NW SW  
13-17S-27W  
Lane County,  
Kansas

ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Hard Rock & Shale	0	275	
Shale	275	390	
Shale with Sand	390	1485	
Sand	1485	1720	
Shale	1720	1814	
Shale	1814	1991	
Anhydrite	1991	2016	
Shale & Lime	2016	2890	
Lime	2890	3090	
Lime & Shale	3090	3780	
Lime	3780	4580	

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 20 1973  
CONSERVATION DIVISION  
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Linda Nowrey  
Linda Nowrey

Subscribed and sworn to before me this 15th day of June, 1973

Linda H. Sickens  
Notary Public

My Commission Expires:

March 8, 1977

