

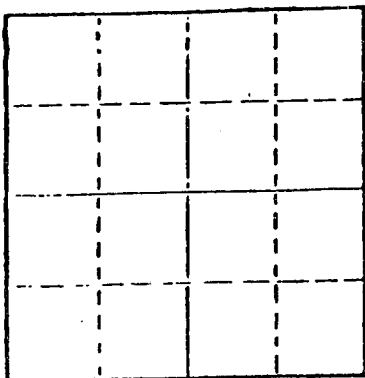
15-101-20581-00-00

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202



Locate well correctly on above
Section Plat

Lane _____ County. Sec. 10 Twp. 17S Rge. 27 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____
SW $\frac{1}{4}$ NW $\frac{1}{4}$
Lease Owner Oxford Exploration Company
Lease Name Selfridge Well No. 10-5
Office Address 1550 Denver Club Bldg., Denver, Co. 80202
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry hole
Date Well completed December 29 1981
Application for plugging filed _____ 19____
Application for plugging approved December 29 1981
Plugging commenced December 29 1981
Plugging completed December 29 1981
Reason for abandonment of well or producing formation _____
Dry hole
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes
Name of Conservation Agent who supervised plugging of this well Gil Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4530
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	356'	8-5/8"	347'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole plugged with 50-50 pozmix, 4% gel, 3% CaCl, as follows:

60 sacks @ 1800'
40 sacks @ 300'
10 sacks @ 40' bridge plug
10 sacks in rathole
5 sacks in mousehole

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Mallard Drilling Co., Inc. - job by Allied Cementing

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
John Jay Darrah, Jr., agent of contractor (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature)

405 Century Plaza, Wichita, Ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 13 day of January, 19 82

Dianne R. Fowler, Notary Public.

My commission expires August 25, 1984

15-101-20581-00-00

D R I L L E R S L O G

COMPANY: OXFORD EXPLORATION COMPANY
 CONTRACTOR: MALLARD DRILLING CO., INC.
 405 Century Plaza
 Wichita, Kansas 67202

WELL NAME: SELFRIDGE 10-5
 DESCRIPTION:
 SW $\frac{1}{4}$ NW $\frac{1}{4}$ 10-17S-27W

RIG NO.: 1

COUNTY: Lane

TOTAL DEPTH: 4530

ELEVATION: 2592 gr.

COMMENCED: December 17, 1981

COMPLETED: December 29, 1981

CASING RECORD:

9 jts. used 28# 8-5/8" surface casing


D. & A.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface soil, shale & sand	0	1005	Ran 347' used 28# 8-5/8" surface casing; set and cemented with 200
Sand	1005	1999	sacks common cement, 2% gel, 3%
Anhydrite top	1999	2170	CaCl at 356' with landing joint.
Shale	2170	3100	Cement circulated. Plug down at
Shale & lime	3100	3338	10:00 a.m., December 17, 1981.
Shale	3338	4007	
Lime	4007	4530	Ran 3 DST's, 1 Log

Hole plugged with 50-50 pozmix, 4% gel, 3% CaCl, as follows: 60 sacks @ 1800', 40 sacks @ 300', 10 sacks & bridge plug @ 40', 10 sacks in rathole, 5 sacks in mousehole. Plugging completed at 3:45 p.m., December 29, 1981.


STATE OF KANSAS)
) SS.
 COUNTY OF SEDGWICK)

I, JOHN JAY DARRAH, JR. of MALLARD DRILLING CO., INC., certify that this is a true and correct copy of the log of the Selfridge 10-5 well, to the best of my knowledge.


 John Jay Darrah, Jr., President

SUBSCRIBED AND SWORN to before me this 13 day of January, 1982.

My Commission Expires:
 August 25, 1984


 Dianne R. Fowler, Notary Public

RECEIVED
 STATE CORPORATION COMMISSION

JAN 15 1982

CONSERVATION DIVISION
 Wichita, Kansas