


15-101-20318-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

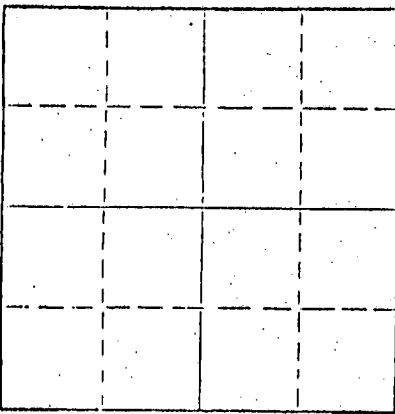

Locate well correctly on above Section Plat

Lane _____ County, Sec. 35 Twp. 16S Rgo. _____ (E) 29 (W) _____
Location as "NE/CNWxSWx" or footage from lines. N/2 S/2 NE/4
Lease Owner Chief Drilling Co., Inc.
Lease Name Gill "C" Well No. #1
Office Address 905 Century Plaza, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 1, 1978
Application for plugging filed June 1, 1978 19_____
Application for plugging approved June 1, 1978 19_____
Plugging commenced June 1, 1978 19_____
Plugging completed June 1, 1978 19_____
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production _____ 19_____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4555' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	281'	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged through drill pipe @ 900' w/70 sx. cement
Plugged through drill pipe @ 240' w/20 sx. cement
Plugged through drill pipe @ 40' w/10 sx. cement

RECEIVED
STATE CORPORATION COMMISSION

SEP 05 1978
09-05-1978
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Chief Drilling Co., Inc.
Address 905 Century Plaza, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Jim Robinson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Robinson
905 Century Plaza, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN to before me this 7th day of June, 19 78

MARILYN SINARD
STATE NOTARY PUBLIC
SEDGWICK COUNTY, KANSAS
MY COMM. EXP. APR. 30, 1979

Marilyn Sinard
Marilyn Sinard Notary Public.

15-101-20318-00-00

WELL LOG

CHIEF DRILLING CO., INC.
905 Century Plaza
Wichita, Kansas 67202

#1 Gill "C"
N/2 S/2 NE/4 Sec. 35-16S-29W
Lane County, Kansas

CONTRACTOR: Warrior Drilling, Inc.
CASING RECORD: 8 5/8" @ 281' w/180' sx.

COMMENCED: May 22, 1978
COMPLETED: June 1, 1978

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATIONS</u>
Surface Sand & Shale	0	292	2795 Gr.
Shale	292	1655	2797 D.F.
Shale & Sand	1655	2312	2800 K.B.
Shale	2312	4015	
Shale & Lime	4015	4179	
Lime	4179	4555	
RTD	4555		

<u>FORMATION TOPS</u>	
Anhydrite	2199 + 601
Base Anhy.	2222 + 578
Heebner	3925 - 1125
KC	3963 - 1163
Stark Shale	4210 - 1410
Marmaton	4317 - 1517
Pawnee	4407 - 1607
Ft. Scott	4457 - 1657
Cher. Shale	4482 - 1682
RTD	4555 - 1755

D & A

STATE OF KANSAS, COUNTY OF SEDGWICK) ss:

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the N/2 S/2 NE/4 Sec. 35-16S-29W, Lane County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

RECEIVED
STATE CORPORATION COMMISSION

Jin Robinson 09-05-1978
Jin Robinson, Vice-President

Subscribed and sworn to before me this 7th day of September, 1978, at Wichita, Kansas

MARILYN SINARD
STATE NOTARY PUBLIC
SEDGWICK COUNTY, KANSAS
MY COMM. EXP. APR. 30, 1979

Marilyn Sinard
Marilyn Sinard Notary Public