


15-101-20115-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

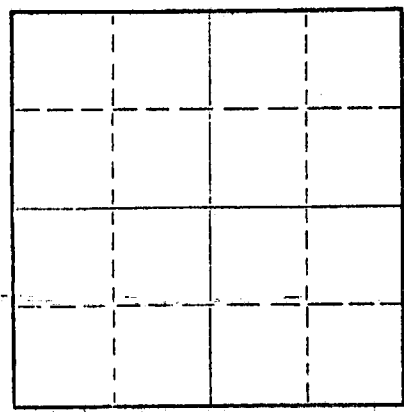

Locate well correctly on above
Section Plat

Lane _____ County, Sec. 35 Twp. 16S Rge. 29 (X) W (W)
Location as "NE/CNW/SW" or footage from lines. C NW SE
Lease Owner John O. Farmer, Inc.
Lease Name Eaton Well No. 1
Office Address 370 W. Wichita, Russell, Ks. 67665
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 3/8/75 _____ 19_____
Application for plugging filed 3/11/75 _____ 19_____
Application for plugging approved Yes _____ 19_____
Plugging commenced 3/8/75 _____ 19_____
Plugging completed 3/8/75 _____ 19_____
Reason for abandonment of well or producing formation -Dry Hole

If a producing well is abandoned, date of last production _____ 19_____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Wilber Bolthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4620 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged hole w/70 sacks 60/40 pozmix @ 1100'
Plugged hole w/20 sacks 60/40 pozmix @ 310'
Plugged hole w/10 sacks 60/40 pozmix @ 40'

RECEIVED
STATE CORPORATION COMMISSION
MAR 12 1975
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Chief Drilling Co., Inc.
Address 905 Century Plaza, Wichita, Kansas 67202


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Lynda Fuson (employee of owner) or (~~owner~~ operator) of the above-described well being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Lynda Fuson
905 Century Plaza, Wichita, Ks. 67202
(Address)

Subscribed and Sworn to before me this 11th day of March, 1975

My commission expires December 30, 1978
Lynda Fuson Notary Public.



WELL LOG

15-101-20115-00-00

CHIEF DRILLING CO., INC.
905 Century Plaza
Wichita, Kansas 67202

1 EATON
C NW SE Sec. 35-16S-29W
Lane County, Kansas

CONTRACTOR: Chief Drilling Co., Inc.
CASING RECORD: Set 293' (7 Jts) of used 28#
8 5/8" set @ 299'. Cemented w/280 sacks
common quick set.

COMMENCED: 2/24/75
COMPLETED: 3/8/75


<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATIONS</u>
Surface hole	0	305	2802 Gr. 2805 D. F. 2808 K. B.
Shale	305	710	
Shale & Sand	710	2095	<u>FORMATION TOPS</u>
Shale	2095	2862	Anhydrite 2200 + 608 Base Anhy. 2233 + 575 Heebner 3932 - 1124 Lansing 3966 - 1158 Base K.C. 4309 - 1501 Marmaton 4323 - 1515 Pawnee 4421 - 1613 Ft. Scott 4471 - 1663 Cherty
Shale & Lime	2862	2975	Shale 4498 - 1690
Lime & Shale	2975	3214	Cong. Sand 4551 - 1743
Lime	3214	3525	Miss. 4572 - 1764
Lime & Shale	3525	3625	Miss. Dol. 4590 - 1782
Lime	3625	4610	T.D. 4620 - 1812
Miss.	4610		

RECEIVED
STATE CORPORATION COMMISSION
MAR 12 1975
03-12-1975
CONSERVATION DIVISION
Wichita, Kansas

Plugged D & A

STATE OF KANSAS, COUNTY OF SEDGWICK) ss:

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the C NW SE Section 35-16S-29W Lane County, Kansas, to the best of my knowledge and belief.



CHIEF DRILLING CO., INC.

Jim Robinson
Jim Robinson, Vice-President

Subscribed and sworn to before me this 11th day of March, 1975.

My Commission Expires: December 30, 1978

Lynda Fuson
Lynda Fuson, Notary Public