

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-017-20447-00-00
Spot: SENWSE Sec/Twnshp/Rge: 25-22S-9E
1650 feet from S Section Line, 1650 feet from E Section Line
Lease Name: BIG SPRINGS A B C Well #: A-5
County: CHASE Total Vertical Depth: 2605 feet

Operator License No.: 6534
Op Name: SCHINDLER, ROBERT DBA SCHINDLE
Address: RR 1 PO BOX 92
MADISON, KS 66860

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	206		125 SXS CMT
PROD	4.5	2605	1218	75 SXS CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/08/2011 8:00 AM
Plug Co. License No.: 6112 Plug Co. Name: LONG DRILLING COMPANY, LLC
Proposal Rcvd. from: ROBERT SCHINDLER Company: _____ Phone: (620) 437-2525

Proposed Plugging Method: PLUG BACK 10' ABOVE TOP PERF AND CAP W/5 SX. RIP AND PULLED 250' OF 4 1/2" CASING, SET BRIDGE AT 250', AND CEMENT TO SURFACE.

Plugging Proposal Received By: _____ WitnessType: PARTIAL
Date/Time Plugging Completed: 09/08/2011 8:00 AM KCC Agent: PATRICK SHIELDS

Actual Plugging Report:

Perfs: _____


DROPPED SAND WITH WATER TO TD (2605') AND DUMP BAILER CAPPED WITH 4 SX OF 60X40 4% GEL. TAGGED PLUG @ 2436. RIPPED CASING AND RECOVERED 1218'. BRIDGE WAS SET AT 260' AND TUBING WAS THEN RAN TO 255'. CONSOLIDATED PUMPED 100 SX OF CEMENT TO SURFACE. CONSOLIDATED TICKET #31603.

Remarks:

Plugged through: TBG

District: 02

Signed _____

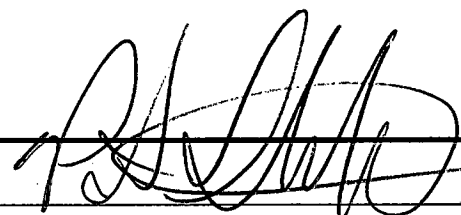

(TECHNICIAN)

RECEIVED Form CP-2/3

APR 03 2012 4/05/12

KCC WICHITA

✓ JK