

Locate well correctly on above
Section Plat

Lane _____ County. Sec. 9 Twp. 17S Rge. 27 (E) (W)
Location as "NE/CNW/SW" or footage from lines C SE NE
Lease Owner Helmerich & Payne, Inc.
Lease Name Leighton "A" Well No. 1
Office Address P. O. Box 558, Garden City, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 7 19 63
Application for plugging filed September 9 19 63
Application for plugging approved September 7 19 63
Plugging commenced September 8 19 63
Plugging completed September 8 19 63
Reason for abandonment of well or producing formation drilled dry.

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. W. L. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4547 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS					CASING RECORD	
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	287'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4547 to 660: Heavy drilling mud.
660 to 602: 20 sacks of cement
602 to 285: Heavy drilling mud.
285 to 231: 20 sacks of cement. (Bridged @ 285 w/hulls)
231 to 40: Heavy drilling mud.
40 to 0: 10 sacks of cement. (Bridged @ 40' w/hulls)

(Cement introduced into well by means of service company pump truck thru drill pipe.)

RECEIVED
STATE CORPORATION COMMISSION

SEP 12 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sierra Petroleum Co., Inc.
Address Petroleum Building, Wichita, Kansas


STATE OF Kansas, COUNTY OF Finney, ss.
T. E. Mort (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) T. E. Mort
P. O. Box 558, Garden City, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of September, 19 63

My commission expires July 1, 1964

INVOICED
DATE 9/12/63
INV. NO. 4435-W




Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

LANE County. Sec. 9 Twp. 17S Rge. 27W (E) (W)

Location as "NE/CNW/SW" or footage from lines C SE NE
Lease Owner Helmerich & Payne, Inc.
Lease Name LEIGHTON A Well No. 1
Office Address First National Building, Tulsa 3, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed Sept. 6, 1963
Application for plugging filed Sept. 7, 1963
Application for plugging approved Sept. 7, 1963
Plugging commenced Sept. 7, 1963
Plugging completed Sept. 8, 1963
Reason for abandonment of well or producing formation Dry Hole

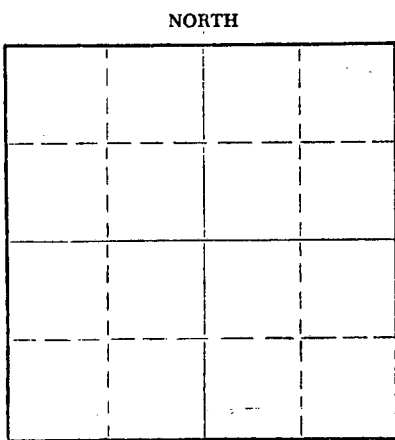

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas
Producing formation Depth to top Bottom Total Depth of Well 4547 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Shale & Shells	Surface Csg.	-0-	284.86' KB	8-5/8"	284.86' KB	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

PLUGGED: Filled hole with heavy mud 4547'
up to 660'. Spotted 20 sx. cement through
drill pipe by Halliburton. Filled hole with
mud up to 285'. Spotted 20 sx. cement through
drill pipe by Halliburton. Filled with mud
up to 40', 1/2 sk. hulls, Halliburton plug,
10 sx. cement to cellar zero.

Job completed at 2 a.m., Sept. 8, 1963.

RECEIVED
STATE CORPORATION COMMISSION
SEP 16 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor SIERRA PETROLEUM CO., INC.
Address 208 Petroleum Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
C. T. HONAKER, DRILLING SUPERINTENDENT

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. T. Honaker C. T. HONAKER, DRLG. SUPT.

Box 232, Russell, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of September, 1963



Leroy Dietz
Notary Public.

15-101-19014-00-00

HELMERICH & PAYNE, INC. - Operator

SIERRA PETRO. CO., INC. - Contractor

LEIGHTON A-1
C SE NE
Sec. 9-17S-27W
Lane County, Kansas

T. D.: 4547'
Elev.: 2604' K.B.

Commenced: 8-23-63
Completed: 9-6-63

Casing:

Cement:

8-5/8" Set at 284.86' K.B.

with 200 sx. Quick Set

FORMATION	DEPTH
Shale & Shells	287
Shale	490
Shale & Sand	760
Shale & Gyp.	1428
Anhydrite	1450
Shale & Shells	2075
Shale	2380
Shale & Shells	2569
Shale & Lime	2905
Lime	3550
Lime & Shale	3665
Lime	3810
Lime & Shale	3880
Lime & Chert	3920
Lime	4494
Chert & Lime	4526
Mississippi Lime	4547

RECEIVED
STATE CORPORATION COMMISSION
SEP 16 1963
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
COUNTY OF RUSSELL) ss:

I hereby certify that the above information is true and correct to the best of my knowledge.

C. T. Honaker
Drilling Superintendent

Subscribed and sworn to before me this 12th day of September, 1963.

Leroy Ditty
Notary Public

My commission expires: 10-17-63

