


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kearny County, Sec. 1 Twp. 21 Rge. 35 W
Location as "NE/CNW/SW" or footage from lines

C SW/4
Lease Owner Gas Producing Interprise
Lease Name Bretz Well No. 3
Office Address Box 1332, Amarillo, Texas 79189
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

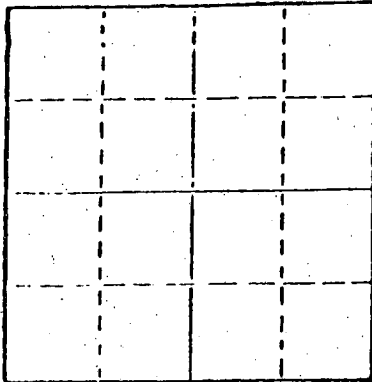

Locate well correctly on above
Section Plat

Date Well completed 5-20 1977
Application for plugging filed 4-10 1978
Application for plugging approved 4-14 1978
Plugging commenced 5-22 1978
Plugging completed 5-23 1978
Reason for abandonment of well or producing formation
Dry Hole

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation Krider Depth to top 2702 Bottom 2720 Total Depth of Well 3185
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Herrington	Dolo & Anhy	2622	2698	8 5/8	497	None
Krider	Dolo	2698	2750	4 1/2	3180	2215
Winfield	Dolo & SD	2750	2850			
Council Grove	Lst	2960	3150			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Pump 10 sks. of cement from 2720 to 2600

Pump 35 sks. of cement from 400 to 300

Put 10 sks. of cement from 40 to 0

RECEIVED
STATE CORPORATION COMMISSION

JUN 21 1978

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sargents Casing Pulling Ser. Box 506 Liberal, Kansas No. 511

STATE OF Texas COUNTY OF Pottaw, ss.
(employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

(Address)

SUBSCRIBED AND SWORN TO before me this 19 day of June, 1978

MR. [Signature]

Notary Public.

My commission expires July 19, 1979

