

15-135-00480-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

Ness County. Sec. 27 Twp. 16 Rge. 25 (E) (W)

Location as "NE/CNW/SW" or footage from lines. C SW SW SW

Lease Owner J. M. Huber Corporation

Lease Name Burrell #1 Well No.

Office Address Box 888, Spearman, Texas 79081

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed October 6 19 62

Application for plugging filed May 4 19 72

Application for plugging approved May 8 19 72


Plugging commenced 5/26/72 19

Plugging completed 6/1/72 19

Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production January 19 72

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

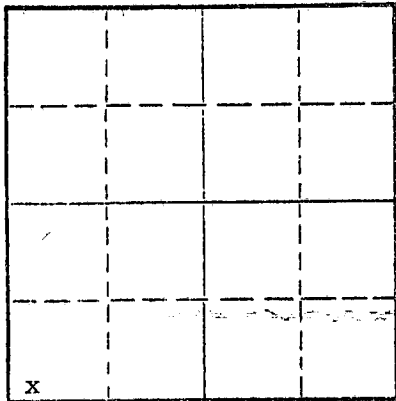

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Massey  
Producing formation Ft. Scott Depth to top 4380' Bottom 4402' Total Depth of Well 4550 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Ft. Scott	Limestone	4380'	4402'	8-5/8	316	none
				4 1/2"	4550	2454'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded hole to 4465', ran 4 sacks of cement. Loaded hole with water, shot pipe at 3008', 2470', pulled 77 joints. Pumped 32 sacks of gel, 3 sacks hulls and 120 sacks of cement.

PLUGGING COMPLETE.



(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.  
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss.  
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight  
CHASE, KANSAS  
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of June, 19 72

My commission expires  
MARGARET MELCHER  
NOTARY PUBLIC  
Rice County, Kansas  
My Commission Expires  
Feb. 15, 1975

Margaret Melcher  
Notary Public.

15-135-00480-00-00

Driller's Log  
J. M. Huber No. 1 Burrell  
C SW SW Section 27-16S-25W  
Ness County, Kansas

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 8 - 1972  
CONSERVATION DIVISION  
Wichita, Kansas

<u>Formation</u>	<u>Depth</u>
(figures indicate bottom of formation)	
Plug and Cement	319'
Shale	1050'
Shale and Shells	1275'
Anhydrite	1302'
Shale and Shells	2295'
Shale and Lime	2985'
Chalk, Shale and Lime	3190'
Lime and Shale	3899'
Lime	3982'
Chalk	4005'
Lime	4550' TD
<u>Tops</u>	
Anhydrite	1275'
Ft. Riley	2450'
Heebner	3833'
Lansing	3871'
Ft. Scott	4378'
Mississippi	4492'
Rotary Total Depth	4550'

I hereby certify that the above is true and correct to the best of my knowledge:



Bob Conley  
Bob Conley, Production Department

Donna Murdock  
Notary Public in and for Potter  
County, Texas

My commission expires: June 1, 1973