

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Barton County, Sec. 26 Twp. 17 Rge. 11 E/W
Location as "NE/CNW/SW" or footage from lines
SE NW NE

Lease Owner Icer Addis
Lease Name BLOOMER Well No. 1

Office Address P.O. Drawer 8038 - Wichita, Ks 67208
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

Date Well completed October 23 19 78
Application for plugging filed 10/23 19 78
Application for plugging approved 10/23 19 78
Plugging commenced Oct. 23 19 78
Plugging completed Oct. 23 19 78
Reason for abandonment of well or producing formation _____

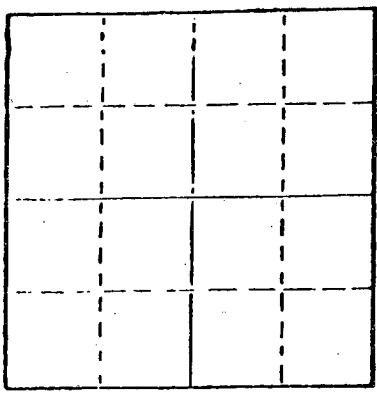

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3323
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

RECEIVED
STATE CORPORATION COMMISSION

Bottom Plug @ 420' w/40 sacks 50/50 pozmix thru drill pipe.
Middle Plug @ 240' w/25 sacks cement and thru drill pipe
Top plug @ 40' - 1/2 sk. hulls-solid bridge & 10 sks. cement
2 sacks cement in rat hole.

OCT 31 1978
10-31-78

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Duke Drilling Co., Inc.

STATE OF Kansas COUNTY OF Barton, ss.
Bill Draney (employee of owner) or (~~owner or operator~~)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill Draney
Box 823 - Great Bend, Ks. 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 25 day of October, 1978

My Commission expires 4-11-1982

Alvin M. League
Notary Public.



DRILLERS' WELL LOG

DATE COMMENCED: October 16, 1978
DATE COMPLETED: October 23, 1978

Loc. Addr:
BLOOMER #1
SE NW NE
Section 26-T17S,R11W
Barton County, Kansas

ELEVATION: 1348 E.B.

0 - 60'	Clay & Shale
60 - 261'	Shale
261 - 629'	Shale & Red Bed
629 - 658'	Anhydrite
658 - 840'	Red Bed
840 - 1700'	Shale
1700 - 2641'	Shale & Lime
2641 - 2893'	Lime
2893 - 2897'	Shale
2897 - 2911'	Lime & Shale
2911 - 2924'	Lime
2924 - 3002'	Shale
3002 - 3013'	Lime & Shale
3013 - 3256'	Lime
3256 - 3295'	Lime, Shale, Chert
3295 - 3323'	Dolomite
3323'	RTD

FORMATION DATA

Anhydrite	629
Topeka	2641
Heebner	2893
Toronto	2911
Douglas	2924
Br. Lime	3002
Lansing	3013
Base KC	3256
Conglomerate	3288
Artuckle	3295
RTD	3323

SURFACE PIPE: Set 260' of 8-5/8"
28# pipe w/150 sacks 50/50 pozmix,
2% Gel, 3% cc.

AFFIDAVIT

STATE OF KANSAS
COUNTY OF BARTON) ss.


Bill Draney, of lawful age does swear and state that the facts and
statements herein contained are true and correct to the best of his knowledge.

Bill Draney

Subscribed and sworn to before me this 25 day of October 1978.

My Commission Expires
4-11-1982

Dorothy M. Hague
Notary Public



RECEIVED
STATE CORPORATE COMMISSION
OCT 31 1978
CONSERVATION DIVISION
TOPEKA, KANSAS