

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Building  
Wichita, Kansas 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-117

API NUMBER 15-135-23,647 0000

LEASE NAME Irvin

WELL NUMBER 1-32

330 Ft. from S Section Line

330 Ft. from E Section Line

SEC. 32 TWP. 16 RGE. 21 (E) or (W)

COUNTY Ness

Date Well Completed 01-12-92

Plugging Commenced 01-13-92

Plugging Completed 01-13-92

TYPE OR PRINT  
NOTICE: Fill out completely  
and return to Cons. Div.  
office within 30 days.

LEASE OPERATOR Theodore I. Leben

ADDRESS 105 S. Broadway-Suite 640 Wichita, KS 67202

PHONE# (316) 264-2375 OPERATORS LICENSE NO. 6668

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on 01-08-92 (date)

by Mr. Barlow (KCC District Agent's Name).

Is ACO-1 filed? yes If not, is well log attached? \_\_\_\_\_

Producing Formation \_\_\_\_\_ Depth to Top \_\_\_\_\_ Bottom \_\_\_\_\_ T.D. 4310

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS | CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_ feet to \_\_\_ feet each set.

Bottom Plug: @ 1600' w/50 sacks cement thru drill pipe

Next Plug: @ 900' w/80 " " " " " 15 sacks in rat Hole

Next Plug: @ 360' w/50 " " " " "

Top Plug: @ 40' w/10 " " " " "

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Duke Drilling Co., Inc. License No. 5929

Address P.O. Box 823 Great Bend, KS 67530

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: THEODORE I. LEBEN

STATE OF KANSAS COUNTY OF SEDGWICK, ss.

RICHARD L. BRADFORD (Employee of Operator) or (Operator) of

above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Richard L Bradford

(Address) 105 S. BROADWAY, SUITE 640 Wichita

SUBSCRIBED AND SWORN TO before me this 20th day of APRIL MAY 29 1992



Debra A. Mann, Notary Public  
Wichita, Kansas

My Commission Expires: March 30, 1994

ORIGINAL

DRILLER'S WELL LOG

DATE COMMENCED: January 6, 1992  
DATE COMPLETED: January 13, 1992

Theodore I. Leben  
IRVIN #1-32  
SE SE SE  
Sec. 32, T16S, R21W  
Ness County, Ks.

0 - 335' Surface Soil, Post Rock, Shale, Sand  
335 - 406' Shale  
406 - 993' Sand, Shale, Clay  
993 - 1254' Sand  
1254 - 1573' Lime & Shale  
1573 - 1609' Anhydrite  
1609 - 2240' Shale & Lime  
2240 - 3698' Lime & Shale  
3698 - 3726' Shale & Lime  
3726 - 3992' Lime  
3992 - 4184' Shale & Lime  
4184 - 4268' Sand  
4268 - 4310' Chert & Lime  
4310' RTD


ELEVATION: 2280' K.B.

Surface Pipe: Set new  
8-5/8", 23# pipe @331'  
w/195 sacks 60/40 pozmix  
2% gel 3% cc.

A F F I D A V I T

STATE OF KANSAS  
COUNTY OF BARTON) ss

Jay Schneider of lawful age, does swear and state that the facts and statements herein are true and correct to the best of his knowledge.

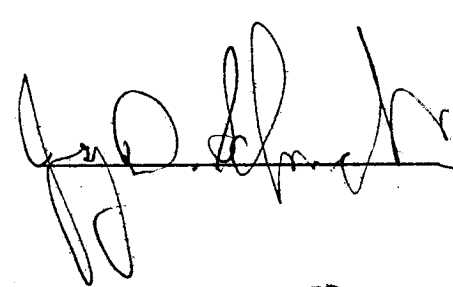

Subscribed and sworn to before me this 15<sup>th</sup> day of January 1992

RECEIVED  
CORPORATION COMMISSION

NOTARY PUBLIC - STATE OF KANSAS  
JAMES L. LINDSEY  
12/1/94

MAY 29 1992  
05-29-1992  
CONSERVATION DIVISION  
Wichita, Kansas  
Notary Public