

15-135-20949-00-00

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Ness County, Sec 23 Twp 16S Rge (E) 24 (W)

Location as "NE/CNW&SW&" or footage from lines NW NW NE

Lease Owner JOHN W. SCHERZINGER

Lease Name Scherzinger Well No. 1

Office Address 7721 State Line Rd., K.C. Mo. 64114

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 12-2 19 74

Application for plugging filed 12-2 19 74

Application for plugging approved 12-2 19 74


Plugging commenced 12-2 19 74

Plugging completed 12-2 19 74

Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

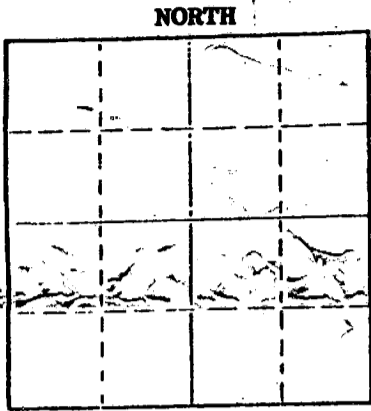

Locate well correctly on above Section Plot

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 4536 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Water	Surface	284	8-5/8"	277	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fluid to 800', plug, 70 sx cement;

Fluid to 240', plug, 20 sx cement;

Fluid to 40', plug, 1/2 sx hulls, 10 sx cement.

RECEIVED
STATE CORPORATION COMMISSION
DEC 9 1974
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor D N B DRILLING, INC. (if additional description is necessary, use BACK of this sheet)

Address 701 First National Building
Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF ss.

JAMES L. DONELSON (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson
701 First Nat'l Bldg., Wichita, Ks.
(Address)

Subscribed and sworn to before me this 6th day of Dec. 19 74

My commission expires August 25, 1976

Ella Priess Notary Public

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976

15-135-20949-00-00

JOHN W. SCHERZINGER
No. 1 Scherzinger
NW NW NE, Sec. 23-16S-24W
Ness County, Kansas

DRILLERS' LOG

Commenced: 11-23-74
Completed: 12- 2-74

Elevation: 2497 K.B.

Surface: 277' of 8-5/8"
cemented w/200 sx common
cement, 2% Gel, 3% cc.
11-24-74

FORMATION

DEPTH

Surface Hole	0 - 284
Shale	284 - 635
Shale, Red Bed, Sand	635 - 1015
Shale	1015 - 1198
Blaine Anhydrite	1198 - 1209
Sand & Shale	1209 - 1560
Red Bed	1560 - 1830
Anhydrite	1830 - 1868
Red Bed & Shale	1868 - 2120
Shale	2120 - 2440
Lime & Shale	2440 - 3920
Lime	3920 - 4536 RTD

RECEIVED
STATE CORPORATION COMMISSION
12-09-1974
DEC 9 1974
CONSERVATION DIVISION
LAWSON, KANSAS

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me, the undersigned, a Notary Public in and for said state, this 6th day of December, 1974.

My Commission Expires:
August 25, 1976

Ella Priess

Ella Priess, Notary Public

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976