


15-135-20803-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

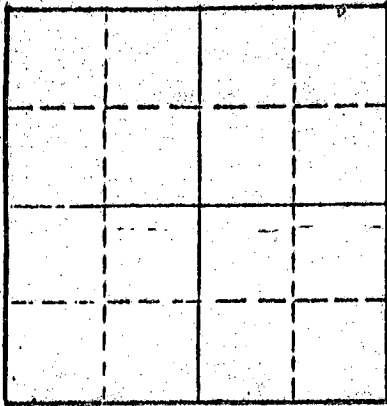

Locate well correctly on above
Section Plot

Ness County, Sec. 30 Twp. 16S Rgs. 24W (E) W (W)
Location at "NE/CNWSW" or footage from lines NW SE
Lease Owner Twin Western Resources, Inc.
Lease Name Giess Well No. 1
Office Address Farmers & Bakers Building, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12/19/73 19
Application for plugging filed 12/19/73 19
Application for plugging approved 12/19/73 19
Plugging commenced 12/19/73 19
Plugging completed 12/19/73 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 4565 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"			8-5/8"	302'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug @ 745' and 70 sacks cement
Plug @ 240' and 20 sacks cement
Plug @ 40' and 10 sacks cement & 1 sack hulls
Complete @ 3:15 a.m.

RECEIVED
STATE CORPORATION COMMISSION
JAN 3 1974
CONSERVATION DIVISION
Wichita, Kansas
01-03-1974

Name of Plugging Contractor Slawson Drilling Company, Inc.
Address 408 One Twenty Building, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick ss.


James C. Remsberg (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James C. Remsberg
James C. Remsberg, Vice-President
408 One Twenty Building, Wichita, Kansas
(Address)

Subscribed and sworn to before me this 27th day of December, 1973

January 17, 1977

Mary Lou Taylor
Mary Lou Taylor Notary Public



15-135-20803-00-00

DRILLERS LOG

Elevation: 2559 K.B.

COMPANY: TWIN WESTERN RESOURCES, INC.
 FARMERS & BANKERS BUILDING
 WICHITA, KANSAS 67202

LEASE NAME: GIESS NO.1
 NW SE
 30-16S-24W
 NESS COUNTY, KANSAS

CONTRACTOR: SLAWSON DRILLING COMPANY, INC.
 408 One Twenty Building
 Wichita, Kansas 67202

TOTAL DEPTH: 4610'

Commenced: 12/6/73

Completed: 12/20/73

Casing: 302' 8-5/8" set at 308' with 200 sx 60-40 Poz, 3% HA5
 Plug dn 8:45 P.M. 12/7/73

0-318 Sand Gray Shale
 318-1550 Shale and shells
 1550-1670 Sand
 1670-1923 Shale
 1923-1955 Anhydrite
 1955-2414 Shale & Lime
 2414-2676 Lime & Shale
 2676-3180 Lime
 3180-3958 Lime and Shale
 3958-4073 Lime
 4073-4148 Lime and shale
 4148-4344 Lime
 4344-4395 Lime and Shale
 4395-4531 Lime
 4531-4549 Miss
 4549-4565 Miss RTD
 Logged

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 3 1974
 CONSERVATION DIVISION
 Wichita, Kansas
 01-03-1974

STATE OF KANSAS

COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Giess No.1 well.

James C. Remsberg
 James C. Remsberg

Subscribed and sworn to me on December 27, 1973

Mary Lou Taylor
 (Notary) Mary Lou Taylor

My commission expires January 17, 1977

