


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Ness County, Sec. 28 Twp. 16S Rge. (E) 21 (W)

Location as "NE/CNW%SW%" or footage from lines C NW NW
Lease Owner Abercrombie Drilling, Inc.
Lease Name NORTH Well No. 1
Office Address 801 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed November 19 19 64
Application for plugging filed November 19 19 64
Application for plugging approved November 19 19 64
Plugging commenced November 19 19 64
Plugging completed November 19 19 64
Reason for abandonment of well or producing formation Dry

NORTH

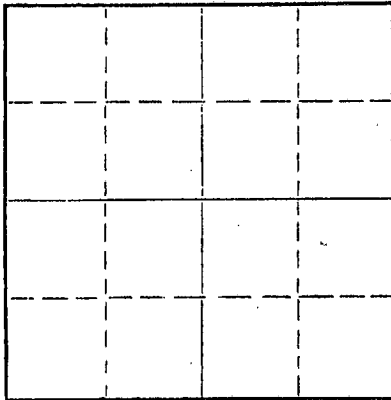

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Verbally - yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4305 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	289	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set 1st plug at 540' w/20 sx cement through DP
Set 2nd plug at 240' w/20 sx & 1/4 sk hulls
Set 3rd plug at 40' w/10 sx & 1/4 sk hulls
Put two sx in rat hole

RECEIVED
STATE CORPORATION COMMISSION

DEC 1 1964

12-01-1964

CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.
Address 801 Union Center, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
B. Lynn Herrington (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) B. Lynn Herrington
801 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN to before me this 23rd day of November, 19 64



My commission expires June 16, 1967

Leah Faye Hefke
Notary Public.

CONTRACTOR'S WELL LOG 15-135-00354-00-00

COMPANY:	Abercrombie Drilling, Inc.
CONTRACTOR:	Abercrombie Drilling, Inc.
FARM:	NORTH #1
LOCATION:	C NW NW Sec. 28-16S-21W Ness County, Kansas
COMMENCED:	November 7, 1964
COMPLETED:	November 19, 1964

0	205	Shale
205	800	Shale and Shells
800	990	Shale and Red Bed
990	1260	Sand
1260	1290	Shale
1290	1576	Shale - Red
1576	1622	Anhydrite
1622	2040	Shale
2040	3334	Shale and Lime
3334	3475	Chalk and Shale
3475	3581	Lime and Shale
3581	3715	Chalky Shale and Lime
3715	3790	Lime and Shale
3790	4120	Lime
4120	4145	Cherty Lime
4145	4206	Lime
4206	4229	Lime and Chert
4229	4280	Lime and Shale
4280	4305	Lime and Chert

Set 8-5/8" Surface Casing at 289' with 200 sacks

DRY & ABANDONED

ELECTRIC LOG TOPS:

Heebner	3692	(-1407)
Toronto	3715	(-1430)
Lansing	3734	(-1449)
Base Kansas City	3998	(-1713)
Pawnee	4085	(-1700)
Base Pawnee	4185	(-1873)
Ft. Scott	4176	(-1891)
Base Ft. Scott	4186	(-1901)
Cherokee Sand	4192	(-1907)
Mississippian	4259	(-1974)
LOG T. D.	4310	(-2025)

ELEVATION: 2285' D.F. & K.B.
2279' G.L.

RECEIVED
STATE CORPORATION COMMISSION

DEC 1 1964
12-01-1964
CONSERVATION DIVISION
Wichita, Kansas


STATE OF KANSAS)
COUNTY OF SEDGWICK) SS

I, B. Lynn Herrington, do hereby certify that the above and foregoing is a true and correct copy of the log of the NORTH #1, C NW NW Sec. 28-16S-21W, Ness County, Kansas, as reflected by the files of Abercrombie Drilling, Inc.

B. Lynn Herrington
B. Lynn Herrington

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 23rd day of November, 1964.

Leah Faye Hefke
Leah Faye Hefke, Notary Public



My commission expires June 16, 1967.