

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

15-051-00952-00-00

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Ellis County, Sec. 26 Twp. 13 Rge. (E) 20 (W)

Location as "NE/CNW/SW" or footage from lines NW SW SW

Lease Owner Sterling Drilling Company, et al

Lease Name Wiesner Well No. 1

Office Address Sterling, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed June 27, 19 56

Application for plugging filed June 27, 19 56

Application for plugging approved June 27, 19 56


Plugging commenced June 27, 19 56

Plugging completed June 27, 19 56

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

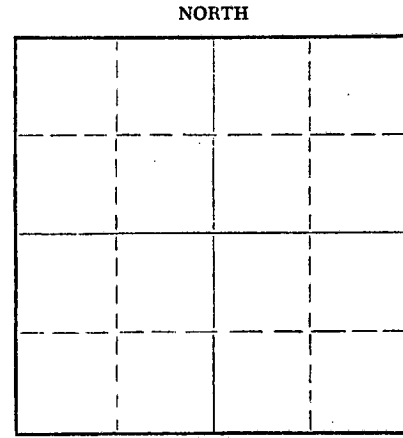

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3880 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	250'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud, set bottom plug at 240' with 20 sacks cement.
Set top plug at 10' with 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Group Exploration Company

Address Sterling, Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.

F. A. Wuellner (Employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *F. A. Wuellner*

Sterling, Kansas (Address)


Subscribed and Sworn to before me this 30th day of June, 1956

Bernard Laudermilch Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

JUL 2 - 1956

CONSERVATION DIVISION
Wichita, Kansas



PLUGGING
FILE SEC 26 T 13 R 20W
BOOK PAGE 76 LINE 1

GROUP EXPLORATION COMPANY
Sterling, Kansas

WELL LOG

15:05:00952:00:00

WIESNER #1

Location: NW SW SW, Section 26-13S-20W,
Ellis County, Kansas

OWNER: Sterling Drilling Company, et al
ROTARY DRILLING CONTRACTOR: Group Exploration Company

COMMENCED: 6-16-56 (w.r.)
COMPLETED: 6-27-56 (w.r.)

TOTAL DEPTH: 3880'

LOG

0-250	Clay, Sand & Shale
250-510	Shale & Shells
510-620	Sand
620-1050	Sand & Shale
1050-1350	Shale & Limestone
1350-1480	Limestone & Shale
1480-1510	Shale & Shells
1510-1560	Anhydrite
1560-2415	Limestone & Shale
2415-2570	Limestone
2570-2770	Shale & Shells
2770-2990	Limestone & Shale
2990-3155	Shale
3155-3265	Shale & Limestone
3265-3410	Limestone
3410-3480	Limestone & Shale
3480-3750	Limestone
3750-3800	Limestone & Conglomerate
3800-3835	Limestone
3835-3865	Cherty Conglomerate
3865-3880	Limestone T.D.

CASING RECORD

Ran 250' of 8-5/8" casing set with
135 sacks cement, 2% calcium chloride.

PRODUCTION

Plugged & Abandoned

PLUGGING
FILE SEC. 26 T. 13 R. 20W
BOOK PAGE 76 LINE 1

RL
STATE CORP. D
MISSION

JUL 2 - 1956

CONSERVATION DIVISION
Wichita, Kansas