


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD / 5051-21273-00-00

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ellis County. Sec. 26 Twp. 13 Rge. 20 E/W
Location as "NE/~~SW~~" or footage from lines North
330 From West Side of 69 From South Side
Lease Owner Blesh-Stem Swiches
Lease Name Herman Well No. 2
Office Address Cath Rt Hays Ks
Character of Well (Completed as Oil, Gas or Dry Hole)

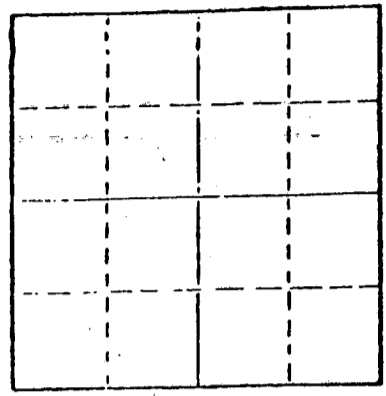

Date Well completed Jan 22 1977
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced Jan 22 1977
Plugging completed Jan 22 1977
Reason for abandonment of well or producing formation
D & A
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Geo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 382
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>8 5/8</u>	<u>surface pipe</u>			<u>8 5/8</u>		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Runned pits, circulated heavy mud, set 70 sk cmt plug at 660'
thru drill pipe. Heavy mud to 185' set 20 sk cmt
plug thru drill pipe. Heavy mud to 40' set solid
buldge & 10 sk cmt plug to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
APR 27 1977

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Helberg Drilling Co & Sarn Oil Well
Cementing Co

STATE OF _____ COUNTY OF _____, ss.
(employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Blesh-Stem Swiches
Cath Rt Hays Ks
(Address)

SUBSCRIBED AND SWORN TO before me this 26th day of April, 1977



My commission expires June 15, 1980

Nancy Allen
Notary Public.

DRILLERS LOG

HERMAN # 2

CASING RECORD:

8 5/8" set at 330'

TOTAL DEPTH:

3812'

OPERATOR: Black-Stem Investors

CONTRACTOR: Helberg Oil Company

COMMENCED: January 11, 1977

COMPLETED: January 22, 1977

DESCRIPTION:

NE 1/4 26-13-20 Ellis County, Kansas

15:051-21273-00-00


<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand & Shale	0	330	
Sand & Shale	330	1270	
Sand & Shale	1270	1517	
Sand & Shale	1517	1815	
Sand & Shale	1815	2125	
Lime & Shale	2125	2279	
Lime & Shale	2279	2445	
Lime	2445	2519	
Lime	2519	2620	
Lime	2620	2735	
Lime	2735	2801	
Lime	2801	2862	
Lime	2862	2950	
Lime & Shale	2950	3065	
Lime	3065	3150	
Lime & Shale	3150	3189	
Lime & Shale	3189	3232	
Lime & Shale	3232	3260	
Lime	3260	3330	
Lime & Shale	3330	3410	
Lime & Shale	3410	3478	
Lime & Shale	3478	3540	
Lime	3540	3615	
Lime	3615	3650	
Lime & Shale	3650	3685	
Lime & Shale	3685	3735	
Lime & Shale	3735	3800	
Lime & Shale	3800	3812	
T.D.	3812		D & A

I certify that this is a true and correct copy of the above log to the best of my knowledge.

HELBERG OIL COMPANY

Jerry M. Helberg
Jerry M. Helberg

Subscribed and sworn to before me this 3rd day of February, 1977.



Faye E. Minium
Faye E. Minium, Notary Public