

15-135-21799-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

RECEIVED
MAY 28 1980
PALOMINO
PETROLEUM

WELL PLUGGING RECORD

Ness County. Sec. 35 Twp. 17S Rge. 25W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
SE SW NE


Lease Owner Palomino and Darrah
Lease Name Krug Well No. #1
Office Address 500 Insurance Building, Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
dry hole

Date Well completed May 18, 1980 19
Application for plugging filed May 18, 1980 19
Application for plugging approved May 18, 1980 19
Plugging commenced May 18, 1980 19
Plugging completed May 18, 1980 19
Reason for abandonment of well or producing formation
dry hole

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4425'
Show depth and thickness of all water, oil and gas formations.

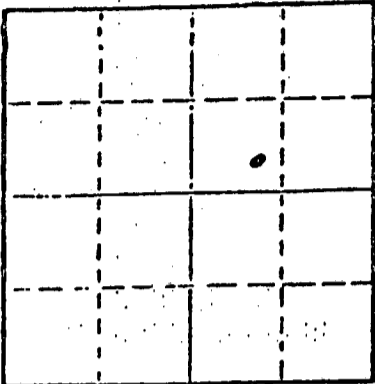

Locate well correctly on above.
Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole plugged with 50-50 pozmix, 6% gel, as follows:
60 sacks at 860', 30 sacks at 300', hulls and 10 sacks
at 40', 2 sacks in mousehole, 3 sacks in rathole.
Plugging completed at 1:00 p.m., May 18, 1980.

RECEIVED
JUL 18 1980
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Strata Drilling Company


STATE OF KANSAS COUNTY OF BARTON, ss.
Charles W. Steincamp (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles W. Steincamp
P. O. Box 355, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of May, 1980.

Loneita Barry
Loneita Barry Notary Public.

My commission expires 3-28-84



15-135-21799-0000

RECEIVED
MAY 28 1980
PALOMINO
PETROLEUM

D R I L L E R S L O G

#1 Krug

CASING RECORD:
7 jts. new 20#
8-5/8" surface

COMPANY: Palomino and Darrah
CONTRACTOR: Strata Drilling Company

DESCRIPTION: SE ~~S~~ NE
Section 35-17S-25W
Ness County, Kansas

TOTAL ROTARY
DEPTH: 4425'

COMMENCED: May 12, 1980
COMPLETED: May 18, 1980

ELEVATION: 2433' KB

D & A

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface soil, shale	0	305	Ran 292' of new 20# 8-5/8" surface casing; set and cemented at 297' with 190 sacks common cement, 2% gel, 3% C.C. Cement circulated. Plug down 6:25 a.m., May 13, 1980.
Shale and sand	305	1692	
Anhydrite	1692	1721	
Shale and Sand	1721	1905	
Lime and shale	1905	4425	

Hole plugged with 50-50 pozmix, 6% gel, as follows: 60 sacks at 860', 30 sacks @ 300', hulls and 10 sacks at 40', 2 sacks in mousehole, 3 sacks in rathole. Job completed at 1:00 p.m., May 18, 1980.

STATE OF KANSAS)
)ss
COUNTY OF BARTON)

RECEIVED
STATE CORPORATION COMMISSION
JUL 18 1980
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

Charles W. Steincamp
Charles W. Steincamp

Sworn to and subscribed before me this 27th day of May, 1980.

My appointment expires 3-28-84.

Loneita Barry
Loneita Barry, Notary Public

