

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-135-23,679-0000

LEASE NAME Hoovler

WELL NUMBER 1-36

4950 Ft. from S Section Line

330 Ft. from E Section Line

SEC. 36 TWP. 17S RGE. 25 (E) (W)

COUNTY Ness

Date Well Completed 7/11/92

Plugging Commenced 7/11/92

Plugging Completed 7/11/92

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR Ranken Energy Corporation

ADDRESS 2325 S.W. 15th St., Edmond, OK 73013

PHONE# (316)-792-3664 OPERATORS LICENSE NO. 3447

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on 7-11-92 (date)

by Richard Lacy (KCC District Agent's Name).

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation _____ Depth to Top _____ Bottom _____ T.D. 4440'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
				8-5/8"	207'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Mud laden fluid 4440'-1710' 10 sks cement @ 40'
50 sks cement @ 1710' 10 sks in mousehole
80 sks cement @ 1100' 15 sks in rathole
40 sks cement @ 230'

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750

Address p. O. Box 506, Russell, KS 67665-0506

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Ranken Energy Corporation

STATE OF KANSAS COUNTY OF RUSSELL, ss.

Kyle B. Branum (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Kyle B. Branum
(Address) Box 506, Russell, KS 67665-0506

SUBSCRIBED AND SWORN TO before me this 13th day of July, 1992

GLEND A. R. TIFFIN
NOTARY PUBLIC
STATE OF KANSAS
MY APPT. EXPIRES 2-6-96

Glenda R. Tiffin
Glenda R. Tiffin, Notary Public
RECEIVED
STATE CORPORATION COMMISSION
JUL 14 1992
CONSERVATION DIVISION
Wichita, Kansas
Form CP-4
Revised 05-88

15-135-23679-0000

EMPHASIS OIL OPERATIONS

P. O. BOX 506
RUSSELL, KS 67665

DRILLERS LOG

OPERATOR: Ranken Energy Corporation
2325 S.W. 15th Street
Edmond, OK 73013

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, KS 67665

LEASE: Hoovler

WELL #1-36

LOCATION: NE NE NE
Section 36-17S-25W
Ness County, Kansas

LOGGERS TOTAL DEPTH: 4439'

ROTARY TOTAL DEPTH: 4440'

COMMENCED: 7/2/92

CASING: 8-5/8" @ 207' w/140 sks cement

ELEVATION: 2414' K.B.

COMPLETED: 7/11/92

STATUS: Dry Hole

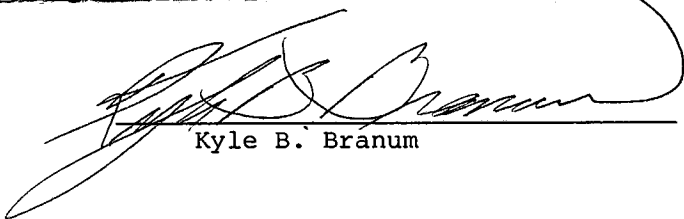
DEPTHS & FORMATIONS

(All measurements from K.B.)

Dakota Sand	703'	Lansing-Kansas City	3781'
Shale	847'	Base Kansas City	4073'
Cedar Hills	1148'	Marmaton	4111'
Shale	1411'	Ft. Scott	4229'
Anhydrite	1682'	Mississippi	4379'
Shale	1717'	R.T.D.	4440'
Heebner	3736'		


STATE OF KANSAS)
) ss
COUNTY OF RUSSELL)

Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.


Kyle B. Branum

Subscribed and sworn to before me on July 13, 1992.

My commission expires: February 6, 1996.

 **GLEND A. R. TIFFIN**
NOTARY PUBLIC
STATE OF KANSAS
MY APPT. EXPIRES 2-6-96


Glenda R. Tiffin, Notary Public

RECEIVED
STATE CORPORATION COMMISSION
JUL 14 1992
CONSERVATION DIVISION
Wichita, Kansas