

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-135-24219-00-00  
Spot: SESWNE Sec/Twnshp/Rge: 8-16S-22W  
2260 feet from N Section Line, 1910 feet from E Section Line  
Lease/Unit Name: VIRGINIA Well Number: 1  
County: NESS Total Vertical Depth: 4446 feet

Operator License No.: 31691  
Op Name: CORAL COAST PETROLEUM, L.C.  
Address: 200 EAST 1ST, STE 001  
WICHITA, KS 67202

Surface Casing Size: 8.625 feet: 227

\$144.50

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/13/2003 11:00 AM  
Plug Co. License No.: 5184 Plug Co. Name: SHIELDS OIL PRODUCERS INC  
Proposal Rcvd. from: BURT Company: SHIELDS OIL PRODUCERS INC Phone: (785) 483-3141

Proposed Plugging Method: 1ST PLUG AT 1805' WITH 50 SX CMT. 2ND PLUG AT 1050' WITH 80 SX CMT. 3RD PLUG AT 500' WITH 40 SX CMT. 4TH PLUG AT 250' WITH 40 SX CMT. 5TH PLUG AT 40' WITH 10 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: Plugging Operations Were Not Witnessed  
Date/Time Plugging Completed: 04/13/2003 1:00 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:


1ST PLUG AT 1805' WITH 50 SX CMT. 2ND PLUG AT 1050' WITH 80 SX CMT. 3RD PLUG AT 500' WITH 40 SX CMT. 4TH PLUG AT 250' WITH 40 SX CMT. 5TH PLUG AT 40' WITH 10 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

RECEIVED  
04-29-2003  
APR 29 2003  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ACID SERVICES.

Plugged through: DP

District: 01

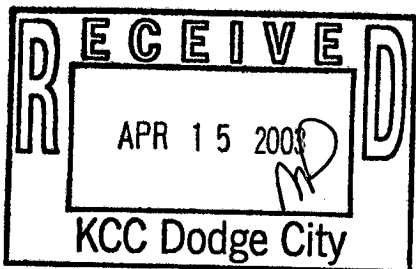

Signed

Stephen J. Pfeifer  
(TECHNICIAN)

INVOICED

DATE 4-29-03  
INV. NO. 2003061468

Form CP-2/3