

15-135-2118-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67317

FORM CP-4

WELL PLUGGING RECORD

Ness County, Sec. 27 Twp. 17 Rge. (E) 21 (W)

Location as "NE/CNW/SE/SW" or footage from lines NW SW SW

Lease Owner THEODORE I. LEBEN

Lease Name McCormick Well No. 1

Office Address 1555 East 2nd St., Wichita, Ks. 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 12-9 19 75

Application for plugging filed 12-9 19 75

Application for plugging approved 12-9 19 75


Plugging commenced 12-9 19 75

Plugging completed 12-9 19 75

Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

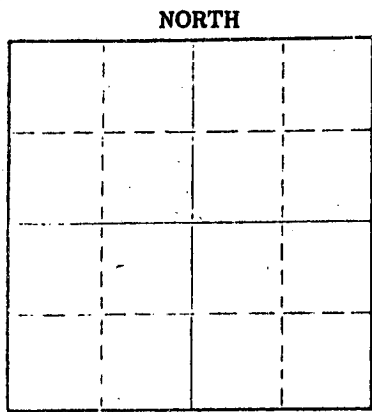

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 4207 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Water	Surf.	367	8-5/8"	359	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fluid to 500', plug, 50 sx cement;
Fluid to 300', plug, 25 sx cement;
Fluid to 40', plug, 1/2 sx hulls, 10 sx cement.

RECEIVED
STATE CORPORATION COMMISSION

DEC 15 1975

Name of Plugging Contractor (If additional description is necessary, use BACK of this sheet) D N B DRILLING, INC.

Address 701 First National Building

Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF ss.

JAMES L. DONELSON (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson
701 First National Bldg., Wichita, KS.

SUBSCRIBED AND SWORN TO before me this 12th day of Dec. 19 75

Ella Priess
Ella Priess Notary Public.

My commission expires 8-25-76

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976

15-135-2118-00-00

DRILLERS' LOG

THEODORE I. LEBEN
No. 1 McCormick
NW SW SW, Sec. 27-37S-21W
Ness County, Kansas

Commenced: 12-1-75
Completed: 12-9-75

Elev: 2161 K.B.

Surface Casing: 359' of
8-5/8" cemented w/225 sx
common cement, 2% Gel 3% cc.

FORMATION

DEPTH

Surface Hole	0 - 367
Shale & Sand	367 - 1000
Sand, Shale & Red Bed	1000 - 1431
Anhydrite	1431 - 1475
Shale	1475 - 2050
Shale & Lime	2050 - 2270
Lime & Shale	2270 - 2490
Lime	2490 - 2725
Lime & Shale	2725 - 3600
Lime	3600 - 4207 RTD

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 12th day of December 1975.

Ella Priess
Ella Priess, Notary Public

12-15-1975

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976