

15-135-20890-00-00


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Ness County. Sec. 17 Twp. 17 Rge. 25 (E) (W)

Location as "NE/CNW&SW4" or footage from lines C NW NW  
Lease Owner Thunderbird Drilling, Inc.  
Lease Name Stutz K#1 Well No.  
Office Address Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 3/12/75 19  
Plugging completed 3/22/75 19  
Reason for abandonment of well or producing formation depleted.

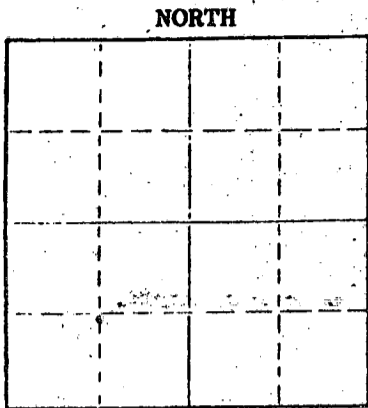

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey  
Producing formation Depth to top Bottom Total Depth of Well 4507 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	263	none
				5 1/2"	4507	2014'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3000'. Shot pipe at 2813', 2621', 2406', 2200', 2024', pulled 63 joints. Pumped 35 sacks gel, 1 sack hulls and 120 sacks 6% pos mix.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.  
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE  
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight  
CHASE, KANSAS

SUBSCRIBED AND SWORN TO before me this 27th day of March 1975

(Address)  
Margaret Melcher  
Notary Public.

My commission expires  
NOTARY PUBLIC  
MARGARET MELCHER  
Rice County, Ks.  
My Comm. Exp. Feb. 15, 1979

RECEIVED  
STATE CORPORATION COMMISSION  
1975 MAR 27  
CONSERVATION DIVISION  
Wichita, Kansas

15-135-20890-00-00

DRILLERS LOG

#1 STUTZ "K"  
C NW NW Section 17-17S-25W  
Ness County, Kansas

OPERATOR: Thunderbird Drilling, Inc.  
P. O. Box 18407  
Wichita, Kansas 67218

CONTRACTOR: Dunne-Gardner Petroleum, Inc.  
Suite 250, 200 West Douglas  
Wichita, Kansas 67202

COMMENCED: May 31, 1974

COMPLETED: June 11, 1974

CASING RECORD: 8-5/8" @ 263' w/175 sx  
5-1/2" @ 4501' w/100 sx

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	263	Clay and shale
263	1250	Shale and shells
1250	1270	Red Bed
1270	1282	Anhydrite
1282	1367	Shale and sand
1367	1680	Sand
1680	1891	Shale and shells
1891	1923	Anhydrite
1923	2252	Shale
2252	2418	Shale and lime
2418	4000	Lime and shale
4000	4507	Lime
4507		Rotary total depth


STATE OF KANSAS )  
                          ) ss  
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct log, to the best of my knowledge and belief.

  
Don Gardner

Subscribed and sworn to before me this 20th day of June, 1974.

My commission expires:  
December 14, 1977

  
Notary Public