


15-135-21071-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

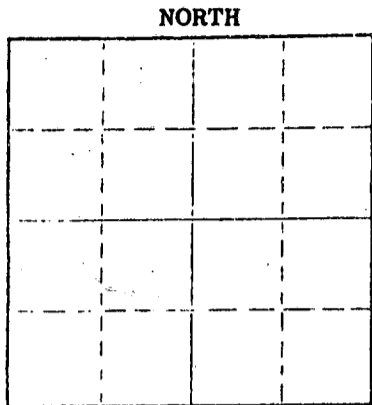

Locate well correctly on above Section Plat

Ness County. Sec. 15 Twp. 17S Rge. (E) 25 (W)
Location as "NE/CNW&SW" or footage from lines C W/2 SW NW
Lease Owner PATRICK PETROLEUM CORPORATION
Lease Name Shearer Well No. 1
Office Address 200 E. First, Suite 414, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 7-4 1975
Application for plugging filed 7-4 1975
Application for plugging approved 7-4 1975
Plugging commenced 7-4 1975
Plugging completed 7-4 1975
Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4495 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|--------------|---------|---------|-----|--------|--------|------------|
| Surface Hole | Water | Surface | 280 | 8-5/8" | 271 | None |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fluid to 720', plug, 70 sx cement;
Fluid to 240', plug, 20 sx cement;
Fluid to 40', 1/2 sx hulls, 10 sx cement

RECEIVED
STATE CORPORATION COMMISSION
JUL 16 1975

Name of Plugging Contractor (If additional description is necessary, use BACK of this sheet) D N B DRILLING, INC
Address 701 First National Building
Wichita, Kansas 67202
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS COUNTY OF _____, SS.
JAMES L. DONELSON (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson
701 First Nat'l Bldg., Wichita, Ks.
(Address)

Subscribed and sworn to before me this 15th day of July, 1975

My commission expires August 25, 1976

Ella Priess
Notary Public.

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976

15-135-21071-00-00

DRILLERS' LOG

PATRICK PETROLEUM CORPORATION
No. 1 Shearer
C W/2 SW NW, Sec. 15-17S-25W
Ness County, Kansas

Elev: 2475 K.B.

Commenced: 6-19-75
Completed: 7-4-75

Surface Casing: 271' of
8-5/8" cemented w/175 sx
common cement, 2% Gel, 3%
cc. 6-19-75

FORMATION

DEPTH

| | |
|------------------|-----------------|
| Surface Hole | 0 - 280 |
| Shale | 280 - 1030 |
| Blaine Anhydrite | 1030 - 1038 |
| Shale | 1038 - 1265 |
| Sand | 1265 - 1505 |
| Shale | 1505 - 1800 |
| Anhydrite | 1800 - 1833 |
| Shale | 1833 - 2355 |
| Lime & Shale | 2355 - 3965 |
| Lime | 3965 - 4495 RTD |

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 15th day of July, 1975.

My Commission Expires:
August 25, 1976

Ella Priess
Ella Priess, Notary Public

RECEIVED
STATE CORPORATION COMMISSION

JUL 16 1975

CONSERVATION DIVISION
Wichita, Kansas

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976