

15-101-20002-00-00


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

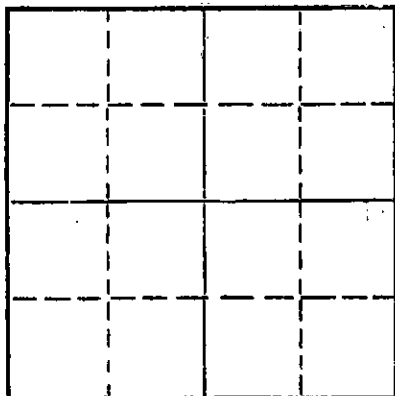

Locate well correctly on above  
Section Plot

\_\_\_\_\_ Jano \_\_\_\_\_ County. Sec. 36 Twp. 17S Rgo. 27 (E) \_\_\_\_\_ (W) X

Location as "NE/CNW/SW" or footage from lines NE SE SW

Lease Owner Ronald Russ Prater, Inc.

Lease Name Brown

Well No. 1

Office Address 501 Fourth National Bank Building Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 4-22-69 19

Application for plugging approved 4-23-69 19

Plugging commenced 4-29-69 19

Plugging completed 5-3-69 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3205 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	310	None
				4 1/2	None	3205

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Moved in. Rigged up. Closed out collar. Sanded to 4510'. Dumped 3 sacks of cement through bailer.

Rigged up jack. Shot well at 3715'. Working pipe.

Shot well at 3420' and 3221'. Working pipe. Pulling pipe.

Plugging well. Pumped 5 sacks of hulls, 11 sacks of mud from 975' - 650', 7 sacks of gel from 650' - 370' and 20 sacks of cement from 370' - 310'. Put on thread protectors.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.

Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

James W. Rockhold

(employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

James W. Rockhold

P. O. Box 221 Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 6 day of May, 1969

My commission expires May 27, 1969

Notary Public.