


15-135-00071-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above  
Section Plat

Ness County. Sec. 24 Twp. 17S Rge. (E) 22 (W)  
Location as "NE/CNW/SW" or footage from lines NE NE SE  
Lease Owner Bankoff Oil Company  
Lease Name Brenner Well No. 1  
Office Address Box 2479, Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed December 11 19 56  
Application for plugging filed December 11 19 56  
Application for plugging approved December 11 19 56  
Plugging commenced December 11 19 56  
Plugging completed December 11 19 56  
Reason for abandonment of well or producing formation No shows

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well R. M. Brundage  
Producing formation Depth to top Bottom Total Depth of Well 4355 Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE  | PUT IN | PULLED OUT |
|-----------|---------|------|----|-------|--------|------------|
|           |         |      |    | 8 5/8 | 242'   |            |
|           |         |      |    |       |        |            |
|           |         |      |    |       |        |            |
|           |         |      |    |       |        |            |
|           |         |      |    |       |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom plug set at 600' - pulled 10 stds drill pipe and poured 55 sks. cement - pulled 2 stds. drill pipe and poured 55 sks. cement - top plug set at 35' w/10 sks. cement to surface.

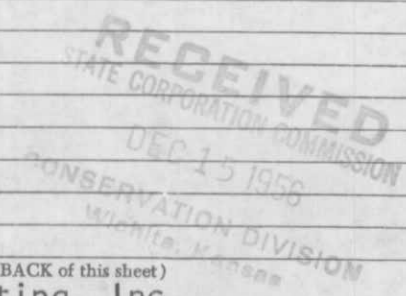

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Sun Oil Well Cementing, Inc.  
Address Hays, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
James M. Battin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James M. Battin  
905 Central Building, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of December, 19 56

Jean Thomas  
Notary Public.

My commission expires July 10, 1957

PLUGGING  
FILE SEC 24 T 17 R 22W  
BOOK PAGE 125 LINE 35

CONTRACTOR'S WELL LOG

Bankoff Oil Company  
 #1 Brenner  
 NE NE SE of Section 24-17S-22W  
 Ness County, Kansas

|      |      |  |                              |
|------|------|--|------------------------------|
| 0    | 40   | Surface Clay                               | COMMENCED: November 27, 1956 |
| 40   | 242  | Shale and Shells                           |                              |
| 242  | 980  | Shale and Red Bed                          | COMPLETED: December 11, 1956 |
| 980  | 1252 | Sand                                       |                              |
| 1252 | 1425 | Shale and Red Bed                          |                              |
| 1425 | 1540 | Red Bed, Shale and Shells                  |                              |
| 1540 | 1575 | Anhydrite                                  |                              |
| 1575 | 1675 | Shale and Shells                           |                              |
| 1675 | 2035 | Shale and Lime                             | SURFACE CASING:              |
| 2035 | 2090 | Shale                                      | Set 8 5/8" at 242' w/175     |
| 2090 | 2570 | Shale and Lime                             | sacks cement and 3 sks.      |
| 2570 | 2656 | Lime                                       | caseal.                      |
| 2656 | 2805 | Lime and Shale                             |                              |
| 2805 | 2920 | Shale and Lime                             |                              |
| 2920 | 3220 | Lime and Shale                             |                              |
| 3220 | 3580 | Shale and Lime                             |                              |
| 3580 | 3655 | Lime and Shale                             |                              |
| 3655 | 3780 | Shale and Lime                             |                              |
| 3780 | 3840 | Lime and Shale                             |                              |
| 3840 | 3895 | Lime                                       |                              |
| 3895 | 3935 | Lime and Shale                             |                              |
| 3935 | 4005 | Shale and Lime                             |                              |
| 4005 | 4100 | Lime and Shale                             |                              |
| 4100 | 4140 | Cherty Lime                                |                              |
| 4140 | 4190 | Lime                                       |                              |
| 4190 | 4225 | Shale and Lime                             |                              |
| 4225 | 4229 | Sand                                       |                              |
| 4229 | 4235 | Shale                                      |                              |
| 4235 | 4315 | Lime and Shale                             |                              |
| 4315 | 4330 | Lime                                       |                              |
| 4330 | 4355 | Mississippi Lime                           |                              |
|      | 4355 | <u>Rotary Total Depth</u> <u>D &amp; A</u> |                              |

State of Kansas )  
 County of Sedgwick) ss:

I, James M. Battin, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1 Brenner, NE NE SE of Section 24-17S-22W, Ness County, Kansas, as reflected by the files of Leben Drilling, Inc..

  
 James M. Battin

Subscribed and Sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 14th day of December, 1956.

  
 (Notary Public)

My commission expires July 10, 1957.

