

15-169-00651-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Saline County. Sec. 32 Twp. 15S Rge. 3 (X) (W)

Location as "NE/CNW&SWK" or footage from lines SE SW NW

Lease Owner H. H. West

Lease Name NELSON Well No. 1

Office Address 830 Main - Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed January 7, 1954

Application for plugging filed January 7, 1954

Application for plugging approved January 7, 1954


Plugging commenced January 7, 1954

Plugging completed January 7, 1954

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

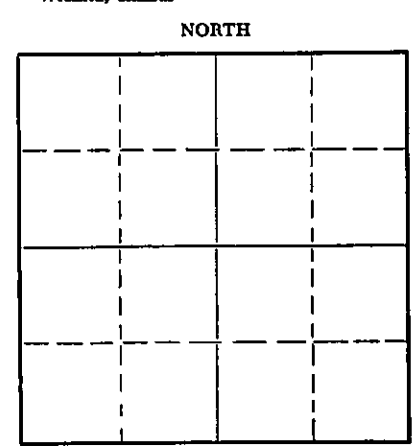

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Maquoketa Lime		3422	3432	8 5/8	350	Cmtd w/ 250 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Hole filled with heavy mud.  
Hole bridged at 250'  
15 sacks cement, through 240' of 4 1/2" drill pipe  
Hole filled with heavy mud to 40'  
5 sacks cement to surface

01-11-54

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Oil Producers  
Address Box 248 - Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.  
H. E. Reiss (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) H. E. Reiss  
Box 248 - Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of January, 1954

Jo Anne Logsdon  
Notary Public.

My commission expires May 28 - 1955

24-7368-8 3-53-20M



**WELL LOG**

**N. H. WEST**  
Nelson #1

**SE SW NW**  
Sec 32, Twp 15S, Rge 3W  
Saline County, Kansas

Total Depth: 3432  
Commenced: December 12, 1953  
Completed: January 7, 1954  
Drilled by Shields Drilling Co., Inc.

**CASING RECORD**

<u>Size</u>	<u>Run</u>	
8 5/8"	150'	Cmtd. w/ 250 sax
		Elevation: 1315 DF
		Treatment:
		Production: D & A

----- Figures Indicate Bottom of Formations -----

Top Soil	20
Sand	35
Shale & Shells	185
Shale & Red Bed	330
Shale & Gyp	340
Lime	350
Anhydrite Lime	395
Lime & Shale	1210
Shale Shells & Salt	1345
Shale & Shells	1410
Lime & Shale	1540
Shale & Shells	1720
Lime & Shale	2155
Shale	2360
Lime & Shale	2425
Shale	2500
Lime	2568
Lime & Shale	2628
Shale	2700
Lime & Shale	2785
Shale	2863
Lime & Shale	3021
Lime	3090
Lime & Shale	3298
Shale	3422
Maquoketa Lime	3432 TD

**TOPS**

Maquoketa Lime 3432

**PLUGGING**  
FILE SEC 32 T 15 R 3W  
BOOK PAGE 6 LINE 42