


15-101-20026-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

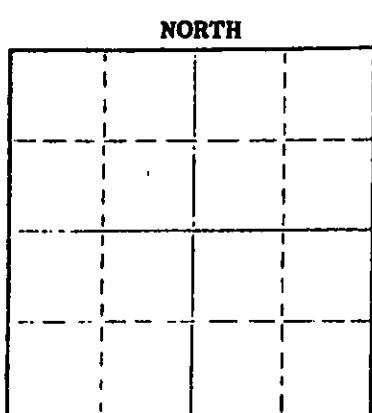

Locate well correctly on above Section Plot

Lane _____ County. Sec. 32 Twp. 16 Rge. 27 (E) _____ (W) _____
Location as "NE/CNW/SW" or footage from lines SE SW SE
Lease Owner Donald C. Slawson
Lease Name Leidig A#1 Well No. _____
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 12/3/75 _____ 19____
Plugging completed 12/20/75 _____ 19____
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4600 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	280	none
				4 1/2"	4308	685'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded to 3980' and ran 4 sacks cement. Loaded hole, shot pipe at 3515', 2516', 1710', 1250', 951', 758', 687', pulled 21 joints of 4 1/2" casing. Pumped 5 sacks hulls, 3 sacks gel, and 100 sacks cement.
PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS

Subscribed and Sworn to before me this 30th day of December (Address) 75 1975

My commission expires _____
NOTARY PUBLIC
MARGARET MELCHER
Rice County, Ks.
My Comm. Exp. Feb. 15, 1979

Margaret Melcher
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION
JAN 13 1976
01-13-1976
CONSERVATION DIVISION
Wichita, Kansas

15-101-20026-00-00

WELL LOG

Company: Donald C. Slawson
Suite 408 One Twenty Building
Wichita, Kansas 67202

Lease: Leidig 'A' #1
SE SW SE, Sec. 32-16-27W
Lane County, Kansas

Total Depth: 4600' Elevation: 2713 K.B.

Contractor: Slawson Drilling Company, Inc.

Commenced: January 8, 1972

Completed: January 17, 1972

Casing: 8 5/8" at 280' with 225 sx cement
4 1/2" at 4308' with 125 sx cement

0-280	Surface Clay
280-2138	Shale & Shells
2138-2173	Anhydrite
2173-3617	Lime & Shale
3617-4600	Lime
4600	Total Depth


STATE OF KANSAS)
) SS:
COUNTY OF SEDGWICK)

I, Maxine V. Starr, of the Slawson Drilling Company, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Leidig 'A' #1 well.

Maxine V. Starr
MAXINE V. STARR

Subscribed and sworn to before me this 28th day of January, 1972.

Linda R. Mitchell
Linda R. Mitchell, Notary Public



RECEIVED
STATE CORPORATION COMMISSION

NOV 25 1975
11-25-1975
CONSERVATION DIVISION
Wichita, Kansas