


15-169-00563-00-00  
Form CP-4

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

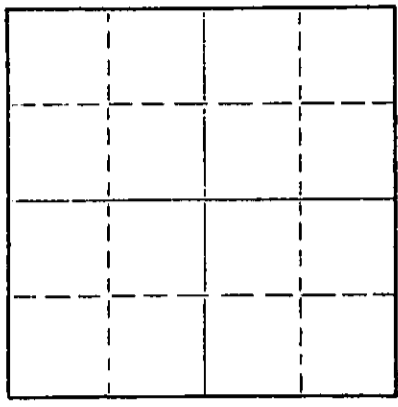

Locate well correctly on above Section Plat

Saline County. Sec. 3 Twp. 16 Rge. 3 W (E) (W)  
Location as "NE/CNWxSWx" or footage from lines NW/ SW/ SE  
Lease Owner Tom Brown  
Lease Name Martin Well No. 6  
Office Address Bx 387 Lindsborg, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed 12-4 19.60  
Application for plugging filed Dec 19.67  
Application for plugging approved Dec 19.67  
Plugging commenced Dec 13 19.67  
Plugging completed Dec 19 19.67  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes Gilbert Toman

Name of Conservation Agent who supervised plugging of this well Gilbert Toman  
Producing formation Depth to top Bottom Total Depth of Well 3276' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		2,712'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3276' to 3250'. Dumped 5 sx of cement. Mudded hole to 260'. Dumped 25 sx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 sx of cement, filling to the bottom of the cellar.

only 8 1504

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Art Lamb Casing Pulling Co.  
Address 2809 King St. Hutchinson, Kansas

STATE OF Kansas COUNTY OF Reno ss.  
Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb  
2809 King St. Hutchinson, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 19 th day of December, 19.67

My commission expires January 5, 1970 Notary Public.

15-169-00563-00-00


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

Company CURRIER & KEYS  
Farm Martin No. 6

SEC. 3 T. 16 R. 3W  
NW SW SE

Total Depth. 3276'  
Comm. 11-26-60 Comp. 12-4-60  
Shot or Treated.  
Contractor. Sterling Drig. Co.  
Issued. 6-8-63

County Saline  
KANSAS



CASING:  
8 5/8" 327' cem w/138 sx.  
5 1/2" 3273' cem w/75 sx.

Elevation. 1303' RB

Production. 40 BOPD

Figures Indicate Bottom of Formations.

shale & shells	327
lime	875
lime & shale	1135
shale	1735
lime	1865
lime & shale	1995
lime	2765
lime & shale	2792
lime & Mississippi	2865
lime	3090
shale	3274
shale ?	3276
Total Depth	
TOPS: SCOUT	
Mississippi	2790
Kinderhook	3050
Maquoketa Shale	3203
Maquoketa Dolomite	3272

DEC 14 1961

GEOLOGICAL DIVISION  
KANSAS GEOLOGICAL SOCIETY