


STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 Give All Information Completely  
 Make Required Affidavit  
 Mail or Deliver Report to:  
 Conservation Division  
 State Corporation Commission  
 211 No. Broadway  
 Wichita, Kansas

WELL PLUGGING RECORD

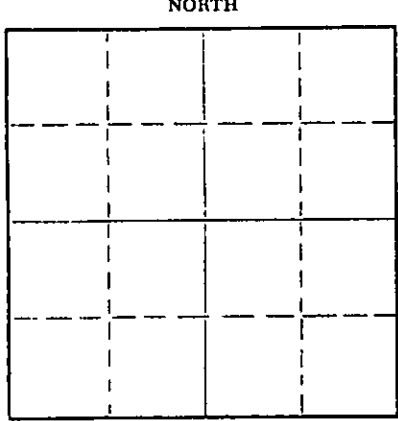

Locate well correctly on above Section Plat

Saline County. Sec. 8 Twp. 16s Rge. (E) 3 (W)  
 Location as "NE/CNW&SW&" or footage from lines NW NE NW  
 Lease Owner John O. Farmer, Inc.  
 Lease Name Linholm Well No. 1  
 Office Address P. O. Box 325, Russell, Kansas  
 Character of Well (completed as Oil, Gas or Dry Hole)  
 Date well completed 19  
 Application for plugging filed 19  
 Application for plugging approved 19  
 Plugging commenced 10-1-19 65  
 Plugging completed 10-27-19 65  
 Reason for abandonment of well or producing formation Dry  
 If a producing well is abandoned, date of last production 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert J. Toman  
 Producing formation Depth to top Bottom Total Depth of Well 3413 Feet  
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	360	None
				5 1/2"	None	2815'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Moved into Lease.  
 Fishing, Pipe shot into at 12'.  
 Drilling with Sand Pump.  
 Drilling with Sand Pump.  
 Drilling with Sand Pump.  
 Sand Pump at 3200', Cleaning Cellar.  
 Rig up. Work Pipe. Shot at 3000'-2900'-2800'. Circulating, spotted 60 bbl. Oil.  
 Working Pipe - Pulling Pipe.  
 Pulling Pipe.  
 Bailed hole to 315'. Build rock 15' Bridge. Capped well with ready mix cement.

Name of Plugging Contractor Forbes Casinf Pulling, Inc.  
 Address P. O. Box 221, Great Bend, Kansas.

STATE OF Kansas COUNTY OF Barton, ss.  
 J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes  
 P. O. Box 221, Great Bend, Kansas-67530  
 (Address)

SUBSCRIBED AND SWORN TO before me this 1st, day of November, 19 65

Ethyl P. Irick  
 Ethyl P. Irick Notary Public.

My commission expires September 24, 1969

15-69-00636-00-00

**WELL LOG**

**Land, Shelburne & Farmer  
Litchheim #1**

**NW NE NW  
Section 8, Twp. 16, Rge. 3W  
Saline County, Kansas**

**Total Depth: 1412'  
Date Commenced: February 7, 1953  
Date Completed: February 19, 1953  
Drilled By: Shields Drilling Co., Inc.**

Casing Run		Pulled by G.M.G.
Size	Run	
1 1/8"	68'	Pulled
3/4"	250'	Cased w/ 200 sax
5 1/2"	1411'	Cased w/ 100 sax

**Elevation: 1344' D.F.  
Treatment:  
Productions:**

-----Figures indicate bottom of formation-----

Surface Clay & Sand	105
Shale	225
Shale & Gyp	340
Anhydrite	355
Lime	565
Shale & Red Bed	595
Shale, Shells & Lime	755
Lime & Shale	1025
Shale & Shells	1070
Shale & Shells	1170
Shale	1200

Salt & Shale	1260
Shale	1760
Lime & Shale	2412
Lime	2810
Lime & Shale	2730
Shale	2950
Lime & Shale	3140
Shale	3412 T. D.

**RECEIVED**  
STATE CORPORATION COMMISSION

OCT 4 1965

CONSERVATION DIVISION  
Wichita, Kansas

**TOPS**

**Magdalena Dolomite  
T. D. Rotary Tools**

**1410'  
1412'**