


15-101-20210-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Lane _____ County. Sec. 3 Twp. 16S Rge. 28W E/W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines _____
W/2 W/2 W/2
Lease Owner Okmar Oil Company
Lease Name Roberts Well No. 1
Office Address 970 - 4th Financial Center, Wichita, Ks.
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry Hole
Date Well completed _____ 3-20 1977
Application for plugging filed _____ 3-20 1977
Application for plugging approved _____ 3-20 1977
Plugging commenced _____ 3-20 1977
Plugging completed _____ 3-20 1977
Reason for abandonment of well or producing formation _____
No commercial quantities of oil or gas encountered.
If a producing well is abandoned, date of last production _____
19 _____

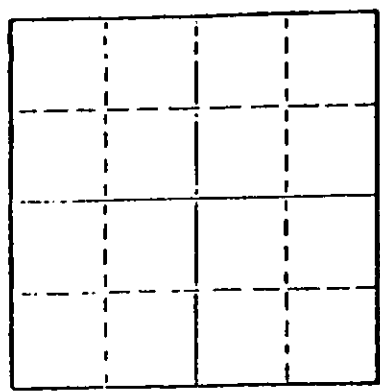

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4420
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Shale	Surf	299	8-5/8"	290	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fluid to 700', plug, 70 sx cement; 3-30-77
Fluid to 300', plug, 20 sx cement;
Fluid to 40', plug, 1/2 sx hulls, 10 sx cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor D N B DRILLING, INC.
701 First National Building
Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF _____, ss.
JAMES L. DONELSON (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson
515 R.H. Garvey Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of March, 19 77

Ella Priess
Notary Public.

My commission expires August 25, 1980

Ella Priess



15-101-20210-00-00

DRILLERS' LOG

OKMAR OIL COMPANY
Roberts No. 1
W/2 W/2 W/2, Sec. 3-16-28W
Lane County, Kansas

Commenced: 3/11/77
Completed: 3/21/77

Surface Casing: 290'
of 8-5/8" used casing
cemented w/200 sx of 60-40
Posmix, 2% Gel, 3% cc
3/12/77

FORMATION

DEPTH

Surface Hole	0	-	299	
Shale, Sand & Red bed	299	-	1300	
Red Bed Shale	1300	-	1431	
Blaine	1431	-	1443	
Shale, Sand, Red bed	1443	-	1981	
Sand & Shale	1981	-	2360	
Shale	2360	-	2633	
Lime & Shale	2633	-	3590	
Lime	3590	-	3875	
Lime & Shale	3875	-	3995	
Lime	3995	-	4225	
Lime & Shale	4225	-	4230	
Lime	4230	-	4340	
Lime & Shale	4340	-	4345	
Lime	4345	-	4420	R.T.D.

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 28th day of March, 1977.

Ella Priess

Ella Priess, Notary Public

