

15-101-20180-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Lane _____ County. Sec. 17 Twp. 17S Rge. XXB) 27 (W)

Location as "NE/CNW/SW" or footage from lines NE SW SW

Lease Owner Beren Corporation

Lease Name WATERSON Well No. 1

Office Address 970 Fourth Financial Center, Wichita, KS 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed May 19 1976

Application for plugging filed (verbally) May 19 1976

Application for plugging approved (verbally) May 19 1976

Plugging commenced May 19 1976


Plugging completed May 19 1976

Reason for abandonment of well or producing formation No commercial quantity

of gas or oil encountered.

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

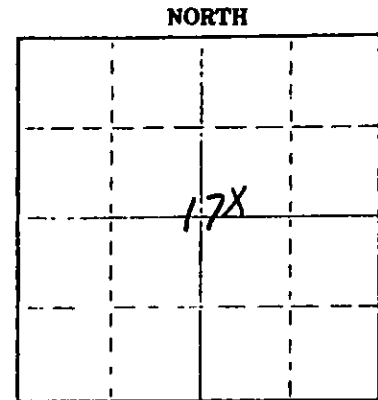

Locate well correctly on above Section Plot

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2230'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	378.01	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st Plug was set @ 950' with 80 sacks
2nd Plug was set @ 350' with 20 sacks
3rd Plug was set @ 40' with 10 sacks

Plug was down @ 6:30 p.m. May 19, 1976 5-27-76
STATE PLUGGER: Gilbert Balthazor

Name of Plugging Contractor Abercrombie Drilling, Inc.
Address 801 Union Center, Wichita, Kansas 67202


STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Jerry A. Langrehr-Exec. V. P.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jerry A. Langrehr
801 Union Center, Wichita, Kansas 67202

Subscribed and sworn to before me this 26th day of May, 1976

My commission expires February 18, 1980
Diane Steincamp Notary Public.



CONTRACTOR'S WELL LOG

15-101-20180-00-00

OPERATOR: Beren Corporation
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: WATERSON #1
 LOCATION: NE SW SW
 Section 17-17S-27W Lane County
 SPUD DATE: May 17, 1976
 COMPLETION DATE: May 19, 1976

0	388	Surface Clay & Shale
388	1200	Shale & Sand
1200	1640	Shale
1640	2107	Sand & Shale
2107	2146	Anhydrite
2146	2230	Shale
	2230	Rotary Total Depth

Drilled 388' of 12½" hole. Ran 9 jts. 8 5/8" casing, 28#. Tallied 370.01'. Set @ 378.01' Cemented with 200 sx. 60/40 Posmix, 3% gel, 2% ca.cl. Followed up with 25 sx. Common cement, 2% gel, 3% ca. cl. Cemented by Halliburton, Cement did circulate Plug was down @ 11:00 p.m. May 17, 1976.

PLUGGED AND ABANDONED: 1st Plug was @ 950' with 80 sx. cement. 2nd Plug was @ 350' with 20 sx. cement. 3rd Plug was @ 40' with 10 sx. cement. 50/50 Posmix, 6% gel. State Pluggger: Gilbert Balthazor - Plug was down @ 6:30 p.m. May 19, 1976.

SAMPLE TOPS:

Anhydrite 2107'
 B/Anhydrite 2146'

STATE OF KANSAS)
 COUNTY OF SEDGWICK) SS

Jerry A. Langrehr, Executive Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the WATERSON #1, NE SW SW, Section 17-17S-27W, Lane County, Kansas.

ABERCROMBIE DRILLING, INC.

By: Jerry A. Langrehr
 Jerry A. Langrehr, Exec. V. P.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 26th day of May, 1976.

Diane Steincamp
 Diane Steincamp, Notary Public

My Commission Expires: February 18, 1980.

