


15-101-20165-00-00

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

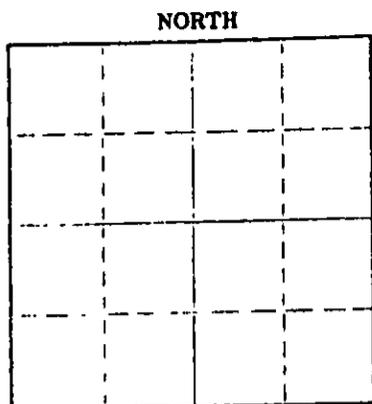

Locate well correctly on above Section Plat

Lane _____ County. Sec. 25 Twp. 16 Rge. 29 (W)
Location as "NE/CNW/SW" or footage from lines. SW NE SE
Lease Owner Petroleum Inc.
Lease Name James 'D' Well No. 1
Office Address 800 R. H. Garvey Building, Wichita 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 1-16-76 19____
Application for plugging filed 1-16-76 19____
Application for plugging approved 1-16-76 19____
Plugging commenced 1-16-76 19____
Plugging completed 1-16-76 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4370 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	310'	8-5/8"	yes	no

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug at 850' with 70 sx 50/50 poz
2nd plug at 300' with 20 sx 50/50 poz
Bridge plug at 40' with 10 sx
2 sx in rat hole
Completed 1:30 p.m. 1-16-76 01-26-1976

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bill Rowe
Address Box 1131, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Sedgwick ss.
James C. Remsberg (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James C. Remsberg
James C. Remsberg Petroleum Engineer
408 One Twenty Building, Wichita 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 22 day of January, 1976

Mary Lou Taylor
Notary Public.

My commission expires 1-17-77



15-101-20165-00-00

DRILLERS LOG

COMPANY: Petroleum, Inc.
800 R. H. Garvey Building
Wichita, Kansas 67202

LEASE NAME: James 'D' No.1
SW NE SE 25-16S-29W
Lane County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
408 One Twenty Building
Wichita, Kansas 67202

COMMENCED: 1-10-76

COMPLETED: 1-16-76

TOTAL DEPTH: 4370'

CASING: 296.91' 8-5/8 cemented with 200 sx

01-26-1974

0' to 245' Clay and sand
245' to 310' Shale
310' to 580' Shale & Shells
580' to 1295' Shale
1295' to 1345' Shale with strks. of sand
1345' to 1959' Sand
1959' to 2197' Shale with sand strks.
2197' to 2227' Anhydrite
2227' to 2705' Shale & shells
2705' to 2875' Shale with lime strks.
2875' to 4005' Shale and Lime
4005' to 4210' Lime and shale
4210' to 4370' Lime
4370' RTD


STATE OF KANSAS

COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc.
upon oath state that the above and foregoing is a true and correct copy
of the log of the James 'D' No.1.


James C. Remsberg, Petroleum Engineer

Subscribed and sworn to me on January 22, 1976


Mary Lou Taylor, Notary

My commission expires January 17, 1977

