

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-115-21354-00-00
Spot: NESW Sec/Twnshp/Rge: 9-19S-1E
1980 feet from S Section Line, 1900 feet from W Section Line
Lease Name: GOERING B Well #: 2
County: MARION Total Vertical Depth: 2900 feet

Operator License No.: 5120
Op Name: RANGE OIL COMPANY, INC.
Address: 125 N MARKET ST STE 1120
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	294		170 SX CMT.
TI	2.375	2894		
PROD	4.5	2899		185 SX CMT.

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 07/29/2011 12:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: ALAN NATION Company: _____ Phone: (620) 222-4304

Proposed Plugging Method: FILL BOTTOM OF CASING W/ SAND UP TO 2850' AND BAIL 10 SX OF CEMENT ON TOP. PULL TUBING UP TO 340' AND PUMP CEMENT FROM 340' TO SURFACE.

Plugging Proposal Received By: _____ Witness Type: NONE
Date/Time Plugging Completed: 04/10/2012 12:00 AM KCC Agent: PATRICK SHIELDS

Actual Plugging Report:

(PER QUALITY WELL SERVICE TICKET #5514) SANDED TO 2820' AND CAP WITH 4 SX, RAN TUBING DOWN BACKSIDE TO 340' AND CIRCULATE 65 SX 60.40 4% GEL TO SURFACE, AND RUN TUBING DOWN 4 1/2" to 340' AND CIRCULATED 90 SX TO SURFACE. TOPPED OFF WITH 10 SX.

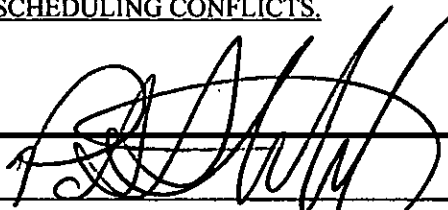

Perfs:

Top	Bot	Thru	Comments
2876	2881		
2870	2872		

Remarks: PLUGGING WAS NOT WITNESSED DUE TO SCHEDULING CONFLICTS.

Plugged through: TBG

District: 02

Signed  (TECHNICIAN) 

RECEIVED Form CP-2/3
APR 20 2012
KCC WICHITA

✓JK