

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-115-21325-00-00
Spot: NESW Sec/Twnshp/Rge: 10-19S-1E
1980 feet from S Section Line, 1900 feet from W Section Line
Lease Name: PENNER A Well #: 2
County: MARION Total Vertical Depth: 2825 feet

Operator License No.: 5120
Op Name: RANGE OIL COMPANY, INC.
Address: 125 N MARKET ST STE 1120
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	251		145 SX
T1	2.375	2750		
PROD	4.5	2825		185 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 07/29/2011 12:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: ALAN NATION Company: _____ Phone: (620) 222-4304

Proposed Plugging Method: FILL BOTTOM OF CASING W/ SAND UP TO 2780' AND BAIL 10 SX OF CEMENT ON TOP. PULL TUBING UP TO 300' AND PUMP FROM 300' TO SURFACE.

Plugging Proposal Received By: _____ WitnessType: NONE
Date/Time Plugging Completed: 04/09/2012 12:00 AM KCC Agent: PATRICK SHIELDS

Actual Plugging Report:

(PER QUALITY WELL SERVICE TICKET #5513) SANDED TO 2780' AND CAPED WITH 4 SX, RAN TUBING DOWN BACKSIDE TO 300' AND CIRCULATED 45 SX OF 60X40 4% TO SURFACE, AND RAN TUBING DOWN 4 1/2" AND CIRCULATED 65 SX TO SURFACE. TOPPED OFF WITH 10 SX.

Perfs:


Top	Bot	Thru	Comments
2810	2817		
2800	2802		

Remarks: PLUGGING WAS NOT WITNESSED DUE TO SCHEDULING CONFLICTS.

Plugged through: TBG

District: 02

Signed _____

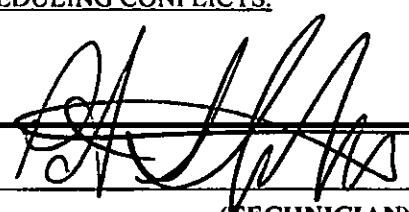

(TECHNICIAN)

✓ 5/1/12

RECEIVED
Form CP-2/3
APR 20 2012

KCC WICHITA

✓